

VILLAGE OF DOWNERS GROVE
Report for the Village Council Meeting
8/2/2022

SUBJECT:	SUBMITTED BY:
Award of Contract - Otis, Grant & Florence Stormwater Improvements (SW-096)	Andy Sikich Public Works Director

SYNOPSIS

A motion is requested to award a contract for the Otis/Florence/Grant Drainage Improvement project to Mauro Sewer Construction of Des Plaines, IL in the amount of \$661,350.90, which includes a 5% contingency.

STRATEGIC PLAN ALIGNMENT

The goals for 2021-2023 include *Top Quality Infrastructure*.

FISCAL IMPACT

Budgeted funds and a grant from DuPage County will cover the cost of this contract. The FY22 budget includes a total of \$600,000 for this contract from the Stormwater Fund and Capital Projects Fund (ARPA funds). In addition, the Village was awarded a grant from DuPage County in the amount of \$251,540 for the contract as part of its American Rescue Plan Act (ARPA) Municipal Grant Program.

RECOMMENDATION

Approval on the August 2, 2022 consent agenda.

BACKGROUND

Grant Street (Fairview Avenue to Florence Avenue), Florence Avenue (Grant Street to Otis Avenue) and Otis Avenue (Fairview Avenue to Florence Avenue) drain poorly due to a lack of storm sewers. Currently, stormwater runoff that collects on Grant Street and Otis Avenue drains onto private property and the existing drainage system on Florence Avenue does not have adequate capacity, which results in frequent flooding of private property. The existing pavement is also in need of resurfacing. This project includes installation of a new storm sewer system and the resurfacing of Grant Street, Florence Avenue and Otis Avenue. The project also includes replacement of the asphalt pedestrian pathway between Otis Avenue and Lincoln Avenue. The project will improve drainage, pavement condition and accessibility and facilitate private stormwater cost share projects.

One tree within the Village right-of-way will be removed to install the new storm sewer system. Staff will coordinate planting of a new tree in the Village's right-of-way within or near the project site to offset the removal of the current tree.

A call for bids (CFB) was issued and published in accordance with the Village's Purchasing Policy. Five bids were received on July 15, 2022 and a synopsis of the bids is as follows:

Contractor	Total Bid	
Mauro Sewer Construction	\$629,858.00	Low Bid
ALamp Concrete Contactors, Inc.	\$629,992.00	
Copenhaver Construction	\$659,694.05	
Chicagoland Paving	\$680,000.00	
Trine Construction	\$716,440.00	

Staff recommends award of the project to Mauro Sewer Construction who has satisfactorily completed road and underground utility projects for Mount Prospect, Northbrook and Ela Township.

ATTACHMENTS

Contract Documents

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)



CALL FOR BIDS – FIXED WORKS PROJECT

- I. Name of Company Bidding: Moura Sewer Construction
- II. Instructions and Specifications:
- | | |
|----------------------------------|---|
| A. Bid No.: | <u>SW-096</u> |
| B. DemandStar Bid No: | <u>CFB-85-0-2022/MS</u> |
| C. For: | <u>Otis/Florence/Grant Drainage Improvements</u> |
| D. Bid Opening Date/Time: | <u>Friday, July 15, 2022 @ 10:00am</u> |
| E. Pre-Bid Conference Date/Time: | <u>Friday, July 8, 2022 @ 10:00am (Optional)</u> |
| F. Pre-Bid Conference Location: | <u>Public Works Building, 5101 Walnut Ave., Downers Grove, IL 60515</u> |
- III. Required of All Bidders:
- | | |
|--|------------|
| A. Bid Deposit: | <u>5%</u> |
| B. Letter of Capability of Acquiring Performance Bond: | <u>YES</u> |
-
- IV. Required of Awarded Contractor(s)
- | | |
|--|------------|
| A. Performance Bond or Letter of Credit: | <u>YES</u> |
| B. Certificate of Insurance: | <u>YES</u> |

Legal Advertisement Published: Friday, July 1, 2022

This document comprises 68 pages.

RETURN ORIGINAL BID (NO STAPLES) IN SEALED ENVELOPE MARKED WITH THE BID NUMBER AS NOTED ABOVE TO :

MATT STERN
 VILLAGE OF DOWNERS GROVE
 5101 WALNUT AVE.
 DOWNERS GROVE, IL 60515
 PHONE: 630/434-5463
 FAX: 630/434-5495
www.downers.us

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

CALL FOR BIDS – FIXED WORKS PROJECT**Bid No.:** SW-096

The VILLAGE OF DOWNERS GROVE will receive bids Monday through Friday, 8:00 A.M. to 5:00 P.M. at the Public Works Building, 5101 Walnut Avenue, Downers Grove, IL 60515.

The Village Council reserves the right to accept or reject any and all bids, to waive technicalities and to accept or reject any item of any Bid.

The documents constituting component parts of this Contract are the following:

- I. CALL FOR BIDS
- II. TERMS & CONDITIONS
- III. GENERAL PROVISIONS
- IV. SPECIAL PROVISIONS
- V. BID & CONTRACT FORM

All Bidders MUST submit the entire bid package, with one original Bid Form. Upon formal Award, the successful Bid will automatically convert to a Contract, and the successful Bidder will receive a copy of the executed contract upon formal award of the Bid with the Notice of Award.

DO NOT DETACH ANY PORTION OF THIS DOCUMENT. INVALIDATION COULD RESULT.

PLEASE DO NOT BIND ANY PORTION OF THE BID WITH STAPLES.

ALL PAGES OF THE BID MUST BE SUBMITTED SINGLE-SIDED.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

I. CALL FOR BIDS and INSTRUCTIONS TO BIDDERS**1. GENERAL**

- 1.1 Notice is hereby given that Village of Downers Grove will receive sealed bids up to the time and date set forth on the cover page of this Call for Bids.
- 1.2 Defined Terms:
 - 1.2.1 Village – the Village of Downers Grove acting through its officers or agents.
 - 1.2.2 Contract Documents – this document plus any drawings issued therewith, any addenda and the Bidder’s completed proposal, bonds and all required certifications.
 - 1.2.3 Bid – this document completed by an individual or entity and submitted to the Village.
 - 1.2.4 Bidder – the individual or entity who submits or intends to submit a bid proposal to the Village.
 - 1.2.5 Contractor – the individual or entity whose bid is selected by the Village and who enters into a contract with the Village.
 - 1.2.6 Work – the construction or service defined herein.
 - 1.2.7 Day – unless otherwise stated all references to day “Day” “Days”, “day” or “days” shall refer to calendar days.
 - 1.2.8 Proposal Guaranty – the required bid deposit.
- 1.3 Bids must be received at the Village by the time and date specified. Bids received after the specified time and date will not be accepted and will be returned unopened to the Bidder.
- 1.4 Bids shall be sent to the Village of Downers Grove, ATTN: MATT STERN, in a sealed envelope marked "SEALED BID." The envelope shall be marked with the name of the project, date, and time set for receipt of Bids. The bid package may be submitted any time prior to the time set for receipt of Bids.
- 1.5 All Bids must be submitted on the forms supplied by the Village and signed by a proper official of the company submitting the Bid. Telephone, email and fax Bids will not be accepted.
- 1.6 Under penalty of perjury, the Bidder certifies by submitting this Bid that he has not acted in collusion with any other Bidder or potential Bidder.

2. BID PREPARATION

- 2.1 It is the responsibility of the Bidder to carefully examine the Contract Documents and to be familiar with all of the requirements, stipulations, provisions, and conditions surrounding the proposed Work.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 2.2 The Bidder shall inspect the site of the proposed Work in detail, investigate and become familiar with all the local conditions affecting the Work and become fully acquainted with the detailed requirements of the Work. Submitting a Bid shall be a conclusive assurance and warranty that the Bidder has made these examinations and that the Bidder understands all requirements for the performance of the Work. If the Bid is accepted, the Bidder will be responsible for all errors in the Bid resulting from his willing or neglectful failure to comply with these instructions. IN NO CASE WILL THE VILLAGE BE RESPONSIBLE FOR ANY COSTS, EXPENSES, LOSSES OR CHANGES IN ANTICIPATED MARGINS OF PROFIT RESULTING FROM THE WILLING OR NEGLECTFUL FAILURE OF THE BIDDER TO MAKE THESE EXAMINATIONS. THE VILLAGE WILL NOT BE RESPONSIBLE FOR ANY COSTS, EXPENSES, LOSSES OR CHANGES IN ANTICIPATED MARGINS OF PROFIT RESULTING FROM THE WILLING OR NEGLECTFUL FAILURE OF THE CONTRACTOR TO PROVIDE THE KNOWLEDGE, EXPERIENCE AND ABILITY TO PERFORM THE WORK REQUIRED BY THIS CONTRACT. No changes in the prices, quantities or contract provisions shall be made to accommodate the inadequacies of the Bidder, which might be discovered subsequent to award of contract. The Bidder shall take no advantage of any error or omission in the Contract Documents nor shall any error or omission in the Contract Documents serve as the basis for an adjustment of the amounts paid to the Bidder.
- 2.3 When the Contract Documents include information pertaining to subsurface explorations, borings, test pits, and other preliminary investigations, such information is included solely for the convenience of the Bidder. *The Village assumes no responsibility whatsoever with respect to the sufficiency of the information, and does not warrant, neither expressly nor by implication, that the conditions indicated represent those existing throughout the Work, or that unanticipated developments may not occur.*
- 2.4 Any information shown in the Contract Documents regarding the locations of underground utility facilities is included solely for the convenience of the Bidder. The Village assumes no responsibility whatsoever with respect to the sufficiency, accuracy or inadequacy of such information. It shall be the Bidder's responsibility to obtain detailed information from the respective utility companies relating to the location of their facilities and the work schedules of the utility companies for removing or adjusting them. Utilities whose facilities may be affected by the work include, but may not be limited to, the following: Nicor, ComEd, SBC, Comcast Cable, Downers Grove Sanitary District, and Village water, storm sewer, and street lighting systems.
- 2.5 No oral or telephone interpretations of specifications shall be binding upon the Village. All requests for interpretations or clarifications shall be made in writing and received by the Village at least five (5) business days prior to the date set for receipt of Bids or the pre-bid conference, if offered. The Village shall make all changes or interpretations of the Contract Documents in a written addendum and shall provide an addendum to any Bidder of record. Any and all changes to the Contract Documents are valid only if they are included by written addendum to all Bidders. Each Bidder must acknowledge receipt of any addenda by indicating same on the Bid Form. Each Bidder, by acknowledging receipt of any addenda, is responsible for the contents of the addenda and any changes to the Bid therein. Failure to acknowledge any addenda may cause the Bid to be rejected. The Village will not assume responsibility for receipt of any addenda. In all cases, it will be the Bidder's responsibility to obtain all addenda issued. Bidders will provide written acknowledgement of receipt of each addendum issued with the bid submission.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 2.6 An estimate of the quantities of Work to be performed and the materials to be furnished is shown in the Bid Form. It is given as a basis for comparing the properly submitted Bids, and shall be used by the Village in awarding the Contract. The Village does not expressly warrant nor imply that the estimated quantities shown will correspond with those quantities required to perform the Work. No Bidder shall plead misunderstanding or deception because of such an estimate of quantities, or because of the character, location or other conditions pertaining to the Work. Payment shall be based on the actual quantities of work properly performed in accordance with the Contract, at the Contract unit prices specified. The Village reserves the right to increase, decrease or omit entirely, any or all items. No allowance will be made for any change in anticipated profits due to an increase or decrease in the original estimate of quantities.
- 2.7 The Bid shall be executed properly, and Bids shall be made for all items indicated in the Bid Form. The Bidder shall indicate, in figures, a unit price or lump sum price for each of the separate items called for in the Bid Form. The Bidder shall show the products of the respective quantities and unit prices in the column provided for that purpose. The gross sum shown in the place indicated in the Bid Form shall be the summation of said products. All writing shall be with ink or typewriter, except the signature of the Bidder, which shall be written with ink.
- 2.8 In case of error in the extension of prices in the Bid, the hourly rate or unit price will govern. In case of discrepancy in the price between the written and numerical amounts, the written amount will govern.
- 2.9 All costs incurred in the preparation, submission, and/or presentation of any Bid including the Bidder's travel or personal expenses shall be the sole responsibility of the Bidder and will not be reimbursed by the Village.
- 2.10 The Bidder hereby affirms and states that the prices quoted herein constitute the total cost to the Village for all work involved in the respective items, as well as the materials to be furnished in accordance with the collective requirements of the Contract Documents. The Bidder also affirms that this cost includes all insurance, bonds, royalties, transportation charges, use of all tools and equipment, superintendence, overhead expense, profits and other work, services and conditions necessarily involved in the work to be done.
- 2.11 The Bidder shall complete and submit with the Bid an "Affidavit" (IDOT Form BC-57, or similar) listing all uncompleted contracts, including subcontract work; all pending low bids not yet awarded or rejected, and equipment available.
- 2.12 The Bidder shall complete and submit with the Bid a "Municipal Reference List" indicating other municipalities for which the Bidder has successfully performed similar work.
- 3. PRE-BID CONFERENCE**
- 3.1 A pre-bid conference may be offered to provide additional information, inspection or review of current facilities or equipment, and to provide an open forum for questions from Bidders. This pre-bid conference is not mandatory (unless stated "Mandatory" on the cover of this document), but attendance by Bidders is strongly advised as this will be the last opportunity to ask questions concerning the Bid.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

3.2 Questions may be posed in writing to the Village (faxed and emailed questions are acceptable), but must be received by the Village prior to the scheduled time for the pre-bid conference. Questions received will be considered at the conference. An addendum may be issued as a result of the pre-bid conference. Such an addendum is subject to the provisions for issuance of an addendum as set forth in Section 2.5 above.

3.3 No Contract Documents will be issued after a mandatory pre-bid conference except to attendees.

4. BID SUBMISSION

4.1 An original copy of the sealed bid marked as indicated in Section 1 shall be submitted to the Village. Please do not bind any portion of the bid with staples.

4.2 A bid deposit will be required, which shall not exceed ten percent (10%) of the estimated cost of the work to be furnished. Such bid deposit shall be in the form of a bid bond, certified check, cash or money order. Checks shall be drawn upon a bank of good standing payable to the order of the Village and said deposit shall be forfeited to the Village in the event the Bidder neglects or refuses to enter into a contract and bond when required, with approved sureties, to execute the Work or furnish the material for the price mentioned in his Bid and according to the plans and specifications in case the contract shall be awarded to him.

4.3 Bids shall be publicly opened at the hour and place indicated above.

5. BID MODIFICATION OR WITHDRAWAL

5.1 A Bid that is in the possession of the Village may be altered by a letter bearing the signature of the person authorized for submitting a Bid, provided that it is received prior to the time and date set for the bid opening. Telephone, email or verbal alterations of a Bid will not be accepted.

5.2 A Bid that is in the possession of the Village may be withdrawn by the Bidder, up to the time set for the bid opening, by a letter bearing the signature of the person authorized for submitting Bids. Bids may not be withdrawn after the bid opening and shall remain valid for a period of ninety (90) days from the date set for the bid opening, unless otherwise specified.

6. BID REJECTION

6.1 Bids that contain omissions, erasures, alterations, additions not called for, conditional bids or alternate bids not called for, or irregularities of any kind, shall be rejected as informal or insufficient. Bids otherwise acceptable, which are not accompanied by the proper Proposal Guaranty, shall also be rejected as informal or insufficient. The Village reserves the right however, to reject any or all Bids and to waive such technical error as may be deemed best for the interest of the Village.

7. BIDDER COMPETENCY

7.1 No Bid will be accepted from, or contract awarded to, any person, firm or corporation that is in arrears or is in default upon any debt or contract. The Bidder, if requested, must present evidence to the Village of ability and possession of necessary facilities, and financial resources to comply with the terms of the Contract Documents. Evidence must be presented within three (3) business days.

8. BIDDER DISQUALIFICATION

8.1 Any one or more of the following causes may be considered as sufficient for the disqualification of a

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Bidder and the rejection of their Bid.

- 8.1.1 More than one Bid for the same Work from an individual, firm partnership, or corporation under the same or different names.
- 8.1.2 Evidence of collusion among Bidders.
- 8.1.3 Unbalanced Bids in which the prices for some items are substantially out of proportion to the prices for other items.
- 8.1.4 Failure to submit a unit price for each item of Work listed in the Bid Form.
- 8.1.5 Lack of competency as revealed by financial statement or experience questionnaire.
- 8.1.6 Unsatisfactory performance record as shown by past work, judged from the standpoint of workmanship and progress.
- 8.1.7 Uncompleted work which, in the judgment of the Village, might hinder or prevent the prompt completion of this Work.
- 8.1.8 Failure to submit a signed Bidder's Certificate stating the following:
 - 8.1.8.1 That the Bidder is not barred from bidding on this Contract as a result of a violation of Sections 720 ILCS 5/33-E3 and 720 ILCS 5/33-E4 of the Illinois Compiled Statutes; and
 - 8.1.8.2 The Bidder is not delinquent in the payment of any tax administered by the Illinois Department of Revenue; and
 - 8.1.8.3 The Bidder will maintain the types and levels of insurance required by the terms of this Contract; and
 - 8.1.8.4 The Bidder will comply with the Illinois Prevailing Wage Act, 820 ILCS 130/1 *et seq.*

9. BASIS OF AWARD

- 9.1 The Village reserves the exclusive right to accept or reject any and all Bids or to waive sections, technicalities and irregularities, or to accept or reject any Bid or any item of any Bid.

10. AWARD OF CONTRACT

- 10.1 Unless the Village exercises its right to reject all Bids, the Contract will be awarded to that responsible Bidder whose Bid, conforming to the Contract Documents, will be most advantageous to the Village, price and other factors considered (the credentials, financial information, bonding capacity, insurance protection, qualifications of the labor and management of the firm, past experience and ability to complete the project within time frame required - lowest responsible bidder).
- 10.2 Unless otherwise specified, if a Contract is not awarded within ninety (90) days after the opening of

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Bids, a Bidder may file a written request with the Village for the withdrawal of their Bid. The Village will have a maximum of ten (10) days after the receipt of such request to award the Contract or release the Bidder from further obligation by return of the Bidder's bid deposit. Any attempt or actual withdrawal or cancellation of a Bid by the awarded contractor who has been notified by the Village of the acceptance of said Bid shall be considered a breach of contract.

11. RETURN OF BID DEPOSIT

- 11.1 The bid deposit of all except the three (3) lowest responsive bidders on each contract will be returned within fifteen (15) days after the opening of Bids. The remaining bid deposits of each contractor will be returned within fifteen (15) days after the Village Council has awarded the contract and the required appurtenances to the contract have been received.

12. FAILURE TO ENTER INTO CONTRACT

- 12.1 Failure on the part of the successful Bidder to execute a Contract and provide acceptable bonds, as provided herein, within ten (10) days from the date of receipt of the Contract and Notice of Award from the Village, will be considered as just cause for the revocation of the award. The Bidder's bid security shall then be forfeited to the Village, not as a penalty, but in payment of liquidated damages sustained as a result of such failure.
- 12.2 Failure on the part of the successful Bidder to provide the Village a construction schedule for approval within ten (10) calendar days from the date of receipt of the Notice of Award from the Village, and, if required, provide a modified construction schedule as requested by the Village within an additional five (5) calendar days, may be considered as just cause for the revocation of the award. In such case, the Bidder's bid security shall then be forfeited to the Village, not as a penalty, but in payment of liquidated damages sustained as a result of such failure.
- 12.3 The Bidder shall not be allowed to claim lack of receipt where the Contract and Notice of Award was mailed by U.S. Postal Services certified mail to the business address listed in his Bid. In case the Village does not receive evidence of receipt within ten (10) days of the date of Notice of Award, the Village may revoke the award. The Bidder shall then forfeit the bid security to the Village, not as a penalty, but in payment of liquidated damages sustained as the result of such failure to execute the Contract.
- 12.4 By submitting a Bid, the Bidder understands and agrees that, if his Bid is accepted, and he fails to enter into a contract forthwith, he shall be liable to the Village for any damages the Village may thereby suffer.

13. SECURITY FOR PERFORMANCE

- 13.1 The successful Bidder shall, within ten (10) days after acceptance of the Bidder's Bid by the Village, furnish a Performance Bond and a Materials and Labor Payment Bond acceptable to the Village in the full amount of the Bid. Said bonds shall guarantee the Bidder's performance under the Contract Documents and shall guarantee payment of all subcontractors and material suppliers. Any bond shall include a provision that guarantees faithful performance of the Illinois Prevailing Wage Act, 820 ILCS 130/1 et seq.

14. TAX EXEMPTION

- 14.1 The Village is exempt from Illinois sales or use tax for direct purchases of materials and supplies. A

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

copy of the Illinois Sales Tax Exemption Form will be issued upon request. The Village's federal identification number will also be provided to the selected Bidder.

15. RESERVED RIGHTS

- 15.1 The Village reserves the right to waive sections, irregularities, technicalities and informalities to this Contract and to accept any Bid and to reject any and all Bids and to disapprove of any and all subcontractors as may be in the best interest of the Village. Time and date requirements for receipt of Bids, however, will not be waived.

16. CATALOGS AND SHOP DRAWINGS

- 16.1 Each Bidder shall submit catalogs, descriptive literature, and detailed drawings, where applicable, to fully illustrate and describe the work or material he proposes to furnish.

17. TRADE NAMES AND SUBSTITUTIONS

- 17.1 Certain materials and equipment are specified by a manufacturer or trade name to establish standards or quality and performance and not for the purpose of limiting competition. Products of other manufacturers may be substituted, if, in the opinion of the Village, they are equal to those specified in quality, performance, design, and suitability for intended use. If the Bidder proposes to furnish an "equal", the proposed "equal" item must be so indicated in the written Bid. Where two or more items are specified, the selection among those specified is the Bidder's option, or he may submit his Bid on all such items. Detail specification sheets shall be provided by Bidder for all substituted items.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

II. TERMS AND CONDITIONS**18. VILLAGE ORDINANCES**

- 18.1 The successful Bidder, now the Contractor, will strictly comply with all ordinances of the Village of Downers Grove and laws of the State of Illinois.

19. USE OF VILLAGE'S NAME

- 19.1 The Contractor is specifically denied the right of using in any form or medium the name of the Village for public advertising unless the Village grants express permission.

20. HOURS OF WORK

- 20.1 The Contractor shall do no work between the hours of 7:00 p.m. and 7:00 a.m., nor on Sundays or legal holidays. The Contractor shall do no work on Saturdays, unless otherwise approved in writing by the Village. If approved by the Village, allowed work hours on Saturdays shall be between the hours of 8:00 a.m. and 3:00 p.m. However, such work may be performed at any time if necessary, for the proper care and protection of work already performed, or in case of an emergency. All after-hour work is still subject to the permission of the Village. Any work, including the starting and/or idling of vehicles or machinery, or a congregation of workers prior to starting work, which may cause any noise level that can be heard by adjacent residents, performed outside of these hours of work and not authorized by the Village shall be subject to a fine of \$250 per day, per violation, which shall be deducted from the value of work completed.

21. PERMITS AND LICENSES

- 21.1 The Contractor shall obtain all necessary permits and licenses required to complete the Work. The cost of acquisition of all necessary permits, bonds, insurance and services as specified herein shall be considered INCLUDED IN THE TOTAL COST, and no additional compensation will be allowed the Contractor.

22. INSPECTION

- 22.1 The Village shall have a right to inspect, by its authorized representative, any material, components or workmanship as herein specified. Materials, components or workmanship that have been rejected by the Village as not in accordance with the terms of the contract specifications shall be replaced by the Contractor at no cost to the Village.

23. DELIVERIES

- 23.1 All materials shipped to the Village must be shipped F.O.B. designated location, Downers Grove, Illinois.

24. SPECIAL HANDLING

- 24.1 Prior to delivery of any product that is caustic, corrosive, flammable or dangerous to handle, the Contractor will provide written directions as to methods of handling such products, as well as the antidote or neutralizing material required for its first aid before delivery. Contractor shall also notify the Village and provide material safety data sheets for all substances used in connection with this Contract which are defined as toxic under the Illinois Toxic Substances Disclosure to Employees Act.

25. NONDISCRIMINATION

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 25.1 Contractor shall, as a party to a public contract:
- 25.1.1 Refrain from unlawful discrimination in employment and undertake affirmative action to assure equality of employment opportunity and eliminate the effects of past discrimination;
 - 25.1.2 By submission of this Bid, the Contractor certifies that he is an "equal opportunity employer" as defined by Section 2000(e) of Chapter 21, Title 42, U.S. Code Annotated and Executive Orders #11246 and #11375, which are incorporated herein by reference. The Equal Opportunity clause, Section 6.1 of the Rules and Regulations of the Department of Human Rights of the State of Illinois, is a material part of any contract awarded on the basis of this Bid.
- 25.2 It is unlawful to discriminate on the basis of race, color, religion, sex, marital status, national origin or ancestry, age, physical or mental disability unrelated to ability, military status, order of protection status, sexual orientation, sexual identity, or an unfavorable discharge from military service. Contractor shall comply with standards set forth in Title VII of the Civil Rights Act of 1964, 42 U.S.C. Secs. 2000 et seq., The Human Rights Act of the State of Illinois, 775 ILCS 5/1-101 et seq., and The Americans with Disabilities Act, 42 U.S.C. Secs. 12101 et seq.

26. SEXUAL HARASSMENT POLICY

- 26.1 The Contractor, as a party to a public contract, shall have a written sexual harassment policy that:
- 26.1.1 Notes the illegality of sexual harassment;
 - 26.1.2 Sets forth the State law definition of sexual harassment;
 - 26.1.3 Describes sexual harassment utilizing examples;
 - 26.1.4 Describes the Contractor's internal complaint process including penalties;
 - 26.1.5 Describes the legal recourse, investigative and complaint process available through the Illinois Department of Human Rights and the Human Rights Commission and how to contact these entities; and
 - 26.1.6 Describes the protection against retaliation afforded under the Illinois Human Rights Act.

27. EQUAL EMPLOYMENT OPPORTUNITY

- 27.1 In the event of the Contractor's non-compliance with the provisions of this Equal Employment Opportunity Clause, the Illinois Human Rights Act or the Rules and Regulations of the Illinois Department of Human Rights ("Department"), the Contractor may be declared ineligible for future contracts or subcontracts with the State of Illinois or any of its political subdivisions or municipal corporations, and the contract may be canceled or voided in whole or in part, and such other sanctions or penalties may be imposed or remedies invoked as provided by statute or regulation. During the performance of this Contract, the Contractor agrees as follows:
- 27.1.1 That it will not discriminate against any employee or applicant for employment because of

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

race, color, religion, sex, marital status, national origin or ancestry, age, physical or mental disability unrelated to ability, military status, order of protection status, sexual orientation, sexual identity, or an unfavorable discharge from military service; and further that it will examine all job classifications to determine if minority persons or women are underutilized and will take appropriate affirmative action to rectify any such underutilization.

- 27.1.2 That, if it hires additional employees in order to perform this Contract or any portion thereof, it will determine the availability (in accordance with the Department's Rules and Regulations) of minorities and women in the area(s) from which it may reasonably recruit and it will hire for each job classification for which employees are hired in such a way that minorities and women are not underutilized.
- 27.1.3 That, in all solicitations or advertisements for employees placed by it or on its behalf, it will state that all applicants will be afforded equal opportunity without discrimination because of race, color, religion, sex, marital status, national origin or ancestry, age, physical or mental disability unrelated to ability, military status, order of protection status, sexual orientation, or an unfavorable discharge from military services.
- 27.1.4 That it will send to each labor organization or representative of workers with which it has or is bound by a collective bargaining or other agreement or understanding, a notice advising such labor organization or representative of the Contractor's obligations under the Illinois Human Rights Act and the Department's Rules and Regulations. If any such labor organization or representative fails or refuses to cooperate with the Contractor in its efforts to comply with such Act and Rules and Regulations, the Contractor will promptly so notify the Department and the contracting agency and will recruit employees from other sources when necessary to fulfill its obligations thereunder.
- 27.1.5 That it will submit reports as required by the Department's Rules and Regulations, furnish all relevant information as may from time to time be requested by the Department or the contracting agency, and in all respects comply with the Illinois Human Rights Act and the Department's Rules and Regulations.
- 27.1.6 That it will permit access to all relevant books, records, accounts and work sites by personnel of the contracting agency and the Department for purpose of investigation to ascertain compliance with the Illinois Human Rights Act and the Department's Rules and Regulations.
- 27.1.7 That it will include verbatim or by reference the provisions of this clause in every subcontract it awards under which any portion of the contract obligations are undertaken or assumed, so that such provisions will be binding upon such subcontractor. In the same manner as with other provisions of this Contract, the Contractor will be liable for compliance with applicable provisions of this clause by such subcontractors; and further it will promptly notify the contracting agency and the Department in the event any subcontractor fails or refuses to comply therewith. In addition, the Contractor will not utilize any subcontractor declared by the Illinois Human Rights Commission to be ineligible for contracts or subcontracts with the State of Illinois or any of its political subdivision or municipal corporations.

28. DRUG FREE WORK PLACE

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 28.1 Contractor, as a party to a public contract, certifies and agrees that it will provide a drug free workplace by:
- 28.1.1 Publishing a statement:
- (1) Notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the Village's or Contractor's workplace.
 - (2) Specifying the actions that will be taken against employees for violations of such prohibition.
 - (3) Notifying the employee that, as a condition of employment on such contract or grant, the employee will:
 - (A) abide by the terms of the statement; and
 - (B) notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.
- 28.1.2 Establishing a drug free awareness program to inform employees about:
- (1) the dangers of drug abuse in the workplace;
 - (2) the Village's or Contractor's policy of maintaining a drug free workplace;
 - (3) any available drug counseling, rehabilitation and employee assistance programs;
 - (4) the penalties that may be imposed upon employees for drug violations.
- 28.1.3 Providing a copy of the statement required by subparagraph 1.1 to each employee engaged in the performance of the contract or grant and to post the statement in a prominent place in the workplace.
- 28.1.4 Notifying the contracting or granting agency within ten (10) days after receiving notice under part (3)(B) of subparagraph 1.1 above from an employee or otherwise receiving actual notice of such conviction.
- 28.1.5 Imposing a sanction on, or requiring the satisfactory participation in a drug abuse assistance or rehabilitation program by, any employee who is so convicted as required by section 5 of the Drug Free Workplace Act.
- 28.1.6 Assisting employees in selecting a course of action in the event drug counseling, treatment and rehabilitation is required and indicating that a trained referral team is in place.
- 28.1.7 Making a good faith effort to continue to maintain a drug free workplace through implementation of the Drug Free Workplace Act.

29. SUBSTANCE ABUSE PREVENTION ON PUBLIC WORKS PROJECTS ACT

- 29.1 In the event this is a public works project as defined under the Prevailing Wage Act, 820 ILCS 130/2, Contractor agrees to comply with the Substance Abuse Prevention on Public Works Projects Act, 820 ILCS 265/1 *et seq.*, and further agrees that all of its subcontractors shall comply with such Act.. As required by the Act, Contractor agrees that it will file with the Village prior to commencing work its written substance abuse prevention program and/or that of its subcontractor(s) which meet or exceed the requirements of the Act.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

30. PREVAILING WAGE ACT

- 30.1 Contractor agrees to comply with the Illinois Prevailing Wage Act, 820 ILCS 130/1 et seq., for all work completed under this Contract. Contractor agrees to pay the prevailing wage and require that all of its subcontractors pay prevailing wage to any laborers, workers or mechanics who perform work pursuant to this Contract or related subcontract. For applicable rates, go to the State of Illinois – Department of Labor website (www.state.il.us/agency/idol/rates/rates.HTM) and use the most current DuPage County rate. The Department revises the prevailing wage rates and the Contractor or subcontractor has an obligation to check the Department's website for revisions to prevailing wage rates throughout the duration of this Contract.
- 30.2 Contractor and each subcontractor shall keep or cause to be kept accurate records of all laborers, mechanics and other workers employed by them on the public works project, which records must include each worker's name, address, telephone number when available, the last four digits of the worker's social security number, gender, race, ethnicity, veteran's status, skill level, classification, hourly wage paid (including itemized hourly cash and fringe benefits paid in each pay period), number of hours worked each day, the starting and ending times of work each day, the worker's hourly wage rate, the worker's hourly overtime wage rate, the worker's hourly fringe benefit rates, the name and address of each fringe benefit fund, the plan sponsor of each fringe benefit, if applicable, and the plan administrator of each fringe benefit, if applicable. These records shall be open to inspection at all reasonable hours by any representative of the Village or the Illinois Department of Labor (IDOL) and must be preserved for five (5) years from the date of the last payment on the public work.
- 30.3 Since this is a contract for a public works project, as defined in 820 ILCS 130/2, Contractor agrees to post at the job site in an easily accessible place, the prevailing wages for each craft or type of worker or mechanic needed to execute the contract or work to be performed.
- 30.4 Because this is a public works project as defined under the Prevailing Wage Act, 820 ILCS 130/2, any and all contractors and subcontractors shall submit certified payroll records to IDOL no later than the fifteenth (15th) day of each calendar month for the immediately preceding month in which construction on a public works project has occurred. Contractor shall then provide an IDOL certification and case number to the Village. WITHOUT THIS PAPERWORK, NO INVOICE SHALL BE PAID BY THE VILLAGE. Filing false records is a Class A misdemeanor.
- 30.5 In the event that this is a construction project where Motor Fuel tax monies or state grant monies are used in the construction, maintenance and extension of municipal streets, traffic control signals, street lighting systems, storm sewers, pedestrian subways or overhead crossings, sidewalks and off-street parking facilities, and the like, the Village will require an Apprenticeship and Training Certification, attached after the Bidder's Certification.
- 30.6 Any bond furnished as security for performance shall include a provision that guarantees faithful performance of the Illinois Prevailing Wage Act, 820 ILCS 130/1 et seq.

31. PATRIOT ACT COMPLIANCE

- 31.1 The Contractor represents and warrants to the Village that neither it nor any of its principals, shareholders, members, partners, or affiliates, as applicable, is a person or entity named as a Specially

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Designated National and Blocked Person (as defined in Presidential Executive Order 13224) and that it is not acting, directly or indirectly, for or on behalf of a Specially Designated National and Blocked Person. The Contractor further represents and warrants to the Village that the it and its principals, shareholders, members, partners, or affiliates, as applicable are not, directly or indirectly, engaged in, and are not facilitating, the transactions contemplated by this Contract on behalf of any person or entity named as a Specially Designated National and Blocked Person. The Contractor hereby agrees to defend, indemnify and hold harmless the Village, and its elected or appointed officers, employees, agents, representatives, engineers and attorneys, from and against any and all claims, damages, losses, risks, liabilities and expenses (including reasonable attorney's fees and costs) arising from or related to any breach of the foregoing representations and warranties.

32. INSURANCE REQUIREMENTS

- 32.1 Prior to starting the Work, Contractor and any Subcontractors shall procure, maintain and pay for such insurance as will protect against claims for bodily injury or death, or for damage to property, including loss of use, which may arise out of operations by the Contractor or Subcontractor or any Sub-Sub Contractor or by anyone employed by any of them, or by anyone for whose acts any of them may be liable. Such insurance shall not be less than the greater of coverages and limits of liability specified below or any coverages and limits of liability specified in the Contract Documents or coverages and limits required by law unless otherwise agreed to by the Village.

Workers Compensation	\$500,000	Statutory
Employers Liability	\$1,000,000	Each Accident
	\$1,000,000	Disease Policy Limit
	\$1,000,000	Disease Each Employee
Comprehensive General Liability	\$2,000,000	Each Occurrence
	\$2,000,000	Aggregate
		<i>(Applicable on a Per Project Basis)</i>
Commercial Automobile Liability	\$1,000,000	Each Accident
Professional Errors & Omissions	\$2,000,000	Each Claim
(pursuant to section.9 below)	\$2,000,000	Annual Aggregate
Umbrella Liability	\$ 5,000,000	

- 32.2 Comprehensive General Liability Insurance required under this paragraph shall be written on an occurrence form and shall include coverage for Products/Completed Operations, Personal Injury with Employment Exclusion (if any) deleted, Blanket XCU and Blanket Contractual Liability insurance applicable to defense and indemnity obligations and other contractual indemnity assumed under the Contract Documents. The limit must be on a "Per Project Basis".

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 32.3 Commercial Automobile Liability Insurance required under this paragraph shall include coverage for all owned, hired and non-owned automobiles.
- 32.4 Workers Compensation coverage shall include a waiver of subrogation against the Village.
- 32.5 Comprehensive General Liability, Employers Liability and Commercial Automobile Liability Insurance may be arranged under single policies for full minimum limits required, or by a combination of underlying policies with the balance provided by Umbrella and/or Excess Liability policies.
- 32.6 Contractor and all Subcontractors shall have their respective Comprehensive General Liability (including products/completed operations coverage), Employers Liability, Commercial Automobile Liability, and Umbrella/Excess Liability policies endorsed to add the "Village of Downers, its officers, officials, employees and volunteers" as "additional insureds" with respect to liability arising out of operations performed; claims for bodily injury or death brought against the Village by any Contractor or Subcontractor employees, or the employees of Subcontractor's subcontractors of any tier, however caused, related to the performance of operations under the Contract Documents. Such insurance afforded to the Village shall be endorsed to provide that the insurance provided under each policy shall be *Primary and Non-Contributory*.
- 32.7 Contractor and all Subcontractors shall maintain in effect all insurance coverages required by the Contract Documents at their sole expense and with insurance carriers licensed to do business in the State of Illinois and having a current A. M. Best rating of no less than A- VIII. In the event that the Contractor or any Subcontractor fails to procure or maintain any insurance required by the Contract Documents, the Village may, at its option, purchase such coverage and deduct the cost thereof from any monies due to the Contractor or Subcontractor, or withhold funds in an amount sufficient to protect the Village, or terminate this Contract pursuant to its terms.
- 32.8 All insurance policies shall contain a provision that coverages and limits afforded hereunder shall not be canceled, materially changed, non-renewed or restrictive modifications added, without thirty (30) days prior written notice to the Village. Renewal certificates shall be provided to the Village not less than five (5) days prior to the expiration date of any of the required policies. All Certificates of Insurance shall be in a form acceptable to the Village and shall provide satisfactory evidence of compliance with all insurance requirements. The Village shall not be obligated to review such certificates or other evidence of insurance, or to advise Contractor or Subcontractor of any deficiencies in such documents, and receipt thereof shall not relieve the Contractor or Subcontractor from, nor be deemed a waiver of the right to enforce the terms of the obligations hereunder. The Village shall have the right to examine any policy required and evidenced on the Certificate of Insurance.
- 32.9 If the Work under the Contract Documents includes design, consultation, or any other professional services, Contractor or the Subcontractor shall procure, maintain, and pay for Professional Errors and Omissions insurance with limits of not less than \$2,000,000 per claim and \$2,000,000 annual aggregate. If such insurance is written on a claim made basis, the retrospective date shall be prior to the start of the Work under the Contract Documents. Contractor and all Subcontractors agree to maintain such coverage for three (3) years after final acceptance of the Project by the Village or such longer period as the Contract Documents may require. Renewal policies during this period shall

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

maintain the same retroactive date.

- 32.10 Any deductibles or self-insured retentions shall be the sole responsibility of the Insured. At the option of the Village, either: the insurer shall reduce or eliminate such deductibles or self-insured retentions as respects the Village, its officers, officials, employees and volunteers; or the Contractor shall procure a bond guaranteeing payment of losses and related investigations, claim administration and defense expenses.

33. INDEMNITY AND HOLD HARMLESS AGREEMENT

- 33.1 To the fullest extent permitted by law, the Contractor shall indemnify, keep and save harmless the Village and its agents, officers, and employees, against all injuries, deaths, strikes, losses, damages, claims, suits, liabilities, judgments, costs and expenses, which may arise directly or indirectly from any negligence or from the reckless or willful misconduct of the Contractor, its employees, or its subcontractors.

- 33.2 The Contractor shall, at its own expense, appear, defend and pay all charges of attorneys and all costs and other expenses arising therefrom or incurred in connection therewith, and, if any judgment shall be rendered against the Village in any such action, the Contractor shall, at its own expense, satisfy and discharge the same. This agreement shall not be construed as requiring the Contractor to indemnify the Village for its own negligence. The Contractor shall indemnify, keep and save harmless the Village only where a loss was caused by the negligent, willful or reckless acts or omissions of the Contractor, its employees, or its subcontractors.

34. SUBLETTING OF CONTRACT

- 34.1 No contract awarded by the Village shall be assigned or any part subcontracted without the written consent of the Village. In no case shall such consent relieve the Contractor from his obligation or change the terms of this Contract.

All approved subcontracts shall contain language which incorporates the terms and conditions of this Contract.

35. TERMINATION OF CONTRACT

- 35.1 The Village reserves the right to terminate the whole or any part of this Contract, upon written notice to the Contractor, for any reason.
- 35.2 The Village further reserves the right to terminate the whole or any part of this Contract, upon written notice to the Contractor, in the event of default by the Contractor. Default is defined as failure of the Contractor to perform any of the provisions of this Contract or failure to make sufficient progress so as to endanger performance of this Contract in accordance with its terms. In the event that the Contractor fails to cure the default upon notice, and the Village declares default and termination, the Village may procure, upon such terms and in such manner as it may deem appropriate, supplies or services similar to those so terminated. The Village may also contact the issuer of the Performance Bond to complete the Work. The Contractor shall be liable for any excess costs for such similar supplies or services. Any such excess costs incurred by the Village may be set-off against any monies due and owing by the Village to the Contractor.

36. BILLING AND PAYMENT PROCEDURES

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

- 36.1 Payment will be made upon receipt of an invoice referencing Village purchase order number. Once an invoice and receipt of materials or service have been verified, the invoice will be processed for payment in accordance with the Village's payment schedule. The Village will comply with the Local Government Prompt Payment Act, 50 ILCS 505/1 et seq., in that any bill approved for payment must be paid or the payment issued to the Contractor within 60 days of receipt of a proper bill or invoice. If payment is not issued to the Contractor within this 60-day period, an interest penalty of 1.0% of any amount approved and unpaid shall be added for each month or fraction thereof after the end of this 60-day period, until final payment is made.
- 36.2 The Village shall review each bill or invoice in a timely manner after its receipt. If the Village determines that the bill or invoice contains a defect making it unable to process the payment request, the Village shall notify the Contractor as soon as possible after discovering the defect pursuant to rules promulgated under 50 ILCS 505/1 et seq. The notice shall identify the defect and any additional information necessary to correct it.
- 36.3 As this Contract is for work defined as a "fixed public work" project under the Illinois Prevailing Wage Act, 820 ILCS 130/2 and pursuant to section 30.4 of this Call For Bid, the Contractor shall provide an IDOL certification and case number to the Village along with the invoice. No invoice shall be paid without said records.
- 36.4 Please send all invoices to the attention of: Village of Downers Grove, Public Works, 5101 Walnut Ave., Downers Grove, IL 60515.
- 37. COMPLIANCE WITH OSHA STANDARDS**
- 37.1 Equipment supplied to the Village must comply with all requirements and standards as specified by the Occupational Safety and Health Act. All guards and protectors as well as appropriate markings will be in place before delivery. Items not meeting any OSHA specifications will be refused.
- 38. CERCLA INDEMNIFICATION**
- 38.1 The Contractor shall, to the maximum extent permitted by law, indemnify, defend, and hold harmless the Village, its officers, employees, agents, and attorneys from and against any and all liability, including without limitation, costs of response, removal, remediation, investigation, property damage, personal injury, damage to natural resources, health assessments, health settlements, attorneys' fees, and other related transaction costs arising under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, 42 U.S.C.A. Sec. 9601, et seq., as amended, and all other applicable statutes, regulations, ordinances, and under common law for any release or threatened release of the waste material collected by the Contractor, both before and after its disposal.
- 38.2 If the Contractor encounters any waste material governed by the above Act, it shall immediately notify the Village and stop working in the area until the above requirements can be met.
- 39. COPYRIGHT or PATENT INFRINGEMENT**
- 39.1 The Contractor agrees to indemnify, defend, and hold harmless the Village against any suit, claim, or proceeding brought against the Village for alleged use of any equipment, systems, or services provided by the Contractor that constitutes a misuse of any proprietary or trade secret information or an infringement of any patent or copyright.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

40. BUY AMERICA

- 40.1 The Contractor agrees to comply with 49 U.S.C.5323(j), the Federal Transportation Administration's (FTA) Buy America regulations at 49 C.F.R. Part 661, and any amendments thereto, and any implementing guidance issued by the FTA, with respect to this Contract, when financed by Federal funds (through a grant agreement or cooperative agreement).
- 40.2 As a condition of responsiveness, the Contractor agrees to submit with its Bid submission, an executed Buy America Certificate, attached hereto.

41. CAMPAIGN DISCLOSURE

- 41.1 Any contractor, proposer, bidder or vendor who responds by submitting a bid or proposal to the Village of Downers Grove shall be required to submit with its bid submission, an executed Campaign Disclosure Certificate, attached hereto.
- 41.2 The Campaign Disclosure Certificate is required pursuant to the Village of Downers Grove Council Policy on Ethical Standards and is applicable to those campaign contributions made to any member of the Village Council.
- 41.3 Said Campaign Disclosure Certificate requires any individual or entity bidding to disclose campaign contributions, as defined in Section 9-1.4 of the Election Code (10 ILCS 5/9-1.4), made to current members of the Village Council within the five (5) year period preceding the date of the bid or proposal release.
- 41.4 By signing the bid documents, contractor/proposer/bidder/vendor agrees to refrain from making any campaign contributions as defined in Section 9-1.4 of the Election Code (10 ILCS 5/9-1.4) to any Village Council member and any challengers seeking to serve as a member of the Downers Grove Village Council.

42. GUARANTEE PERIOD

- 42.1 The Contractor shall guarantee all work and provide a maintenance bond for the full amount of the contract, covering a minimum period of one (1) year after approval and acceptance of the Work. The bond shall be in such form as the Village may prescribe, unless otherwise noted in the Specifications, and shall be submitted before receiving final payment. If longer guarantee periods are required, they will be noted in the Special Provisions for this project.

43. SUCCESSORS AND ASSIGNS

- 43.1 The terms of this Contract will be binding upon and inure to the benefit of the parties and their respective successors and assigns; provided, however, that neither party will assign this Contract in whole or in part without the prior written approval of the other. The Contractor will provide a list of key staff, titles, responsibilities, and contact information to include all expected subcontractors.

44. WAIVER OF BREACH OF CONTRACT

- 44.1 The waiver by one party of any breach of this Contract or the failure of one party to enforce at any time, or for any period of time, any of the provisions hereof will be limited to the particular instance and will not operate or be deemed to waive any future breaches of this Contract and will not be construed to be a waiver of any provision except for the particular instance.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

45. CHANGE ORDERS

- 45.1 The contract price is a “not-to-exceed” cost. At any time additional work is necessary or requested, and the not-to-exceed price is increased thereby, all parties must agree to any change, addition or price increase in writing.
- 45.2 Change orders for public works projects which authorize an increase in the contract price that is 50% or more of the original contract price or that authorize or necessitate any increase in the price of a subcontract under the contract that is 50% or more of the original subcontract price must be resubmitted for bidding in the same manner by which the original contract was bid. (50 ILCS 525/1)

46. SEVERABILITY OF INVALID PROVISIONS

- 46.1 If any provisions of this Contract are held to contravene or be invalid under the laws of any state, country or jurisdiction, contravention will not invalidate the entire Contract, but it will be construed as if not containing the invalid provision and the rights or obligations of the parties will be construed and enforced accordingly.

47. GOVERNING LAW AND VENUE

- 47.1 This Contract will be governed by and construed in accordance with the laws of the State of Illinois. Venue is proper only in the County of DuPage for state cases or the Northern District of Illinois for federal cases.

48. NOTICE

- 48.1 Any notice will be in writing and will be deemed to be effectively served when deposited in the mail with sufficient first class postage affixed, and addressed to the party at the party's place of business. Notices shall be addressed to the Village as follows:

**Village Manager
Village of Downers Grove
801 Burlington Ave.
Downers Grove, IL 60515**

And to the Contractor as designated on the Contract Form.

49. AMENDMENT

- 49.1 This Contract will not be subject to amendment unless made in writing and signed by all parties.

50. COOPERATION WITH FOIA COMPLIANCE

- 50.1 Contractor acknowledges that the Freedom of Information Act does apply to public records in possession of the Contractor or a subcontractor. Contractor and all of its subcontractors shall cooperate with the Village in its efforts to comply with the Freedom of Information Act. 5 ILCS 140/1 et seq.

51. EMPLOYMENT OF ILLINOIS WORKERS ON PUBLIC WORKS ACT

- 51.1 If the work contemplated by this Contract is funded or financed in whole or in part with State Funds or funds administered by the State, Contractor agrees to comply with the terms of the Employment of Illinois Workers on Public Works Act by employing at least 90% Illinois laborers on the project. 30 ILCS 570/1 et seq. Contractor agrees further to require compliance with this Act by all of its

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

subcontractors.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

III. GENERAL PROVISIONS**1. STANDARD SPECIFICATIONS**

- 1.1 The following standards shall govern the construction of the proposed improvements:
 - 1.1.1 Standard Specifications for Water and Sewer Main Construction in Illinois, Seventh Edition, 2014 (the Water & Sewer Specs.); and
 - 1.1.2 Standard Specifications for Road and Bridge Construction as adopted by the Illinois Department of Transportation, January 1, 2022; along with Supplemental Specifications and Recurring Special Provisions as adopted by the Illinois Department of Transportation, January 1, 2022 (collectively the “SSRBC”); and
 - 1.1.3 Water Distribution Specifications, Village of Downers Grove, Illinois, revised January 2017.
 - 1.1.4 Standard Detail Drawings, Village of Downers Grove, Illinois revised January, 2019.
- 1.2 These Contract Documents shall take precedence whenever there are conflicts in the wording or statements made by the above specifications and these Contract Documents.
- 1.3 Unless otherwise referenced herein, Division I of the Water and Sewer Specs and Section 102 and Articles 104.03, 104.07, 107.02, 107.27, 107.35, 108.10, 108.11, and 108.12 of the SSRBC are hereby ineffective and not a part of this Contract.

2. COOPERATION OF CONTRACTOR

- 2.1 The Contractor will be supplied with a minimum of 2 sets of approved plans and contract assemblies including Special Provisions, one set of which the Contractor shall keep available on the work site at all times. The Contractor shall give the work site constant attention necessary to facilitate the progress thereof, and shall cooperate with the Village in every way possible.
- 2.2 The Contractor shall assign a superintendent for the work per Sections 105.06 and 108.06 of the SSRBC and as amended herein. The Contractor’s superintendent shall be involved in the work to the extent necessary to prosecute the work per the Contract. Furthermore, the superintendent shall be required to attend weekly progress meetings, provide two-week schedules of expected construction activities, provide updated overall construction schedules and, if required by the Engineer, acknowledge and sign IDOT Form BC-239 Weekly Report of Resident. The Contractor shall not replace the superintendent without prior written notification to the Village.

3. LEGAL REGULATIONS AND RESPONSIBILITY TO THE PUBLIC

- 3.1 Section 107 of the SSRBC shall govern the Contractor’s legal regulations and responsibility to the public, with the following additions:
 - 3.1.1 PROJECT SAFETY. Add the following to Article 107.28:
 - 3.1.1.1 The Contractor shall conduct his work in such a manner as to provide an environment consistent with the safety, health and well being of those engaged in

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

the completion of the Work specified in this Contract.

- 3.1.1.2 The Contractor shall comply with all State and Federal Safety Regulations as outlined in the latest revisions of the Federal Construction Safety Standards (Series 1926) and with applicable provisions and/or regulations of the Occupation Safety and Health Administration (OSHA) and Standards of the Williams-Stelger Occupational Health Safety Act of 1970 (Revised). SPECIAL ATTENTION SHALL BE PAID TO COMPLIANCE WITH OSHA'S SUBPART P – EXCAVATIONS STANDARD.
- 3.1.1.3 The Contractor and Village shall each be responsible for their own respective agents and employees.
- 3.1.1.4 The Contractor shall, prior to performing any work, request information from the Village regarding any existing confined spaces owned by the Village that may be entered in the course of the work, and shall obtain all required confined space entry permits prior to entering any confined spaces. Contractor shall follow all current laws and regulations with regard to confined space entry. Contractor shall maintain and, upon request, provide full documentation of compliance with the appropriate confined space permits for each separate confined space entered on the project.
- 3.1.2 **BACKING PRECAUTIONS.** Pursuant to Sections 14-139(b) and 14-171.1 of the Downers Grove Municipal Code, any motor vehicle which has an obstructed view to the rear and is to be operated at any time in reverse gear on the public streets of the Village by the Contractor or any subcontractor shall either be equipped with a reverse signal alarm (backup alarm) audible above and distinguishable from the surrounding noise level, or shall provide an observer to signal that it is safe to back up.
- 3.1.3 **OVERWEIGHT, OVERWIDTH AND OVERHEIGHT PERMITS.** The Village has and supports an overweight truck enforcement program. Contractors are required to comply with weight requirements and safety requirements as established by Illinois Law or Village Ordinance, for vehicles, vehicle operators and specialty equipment. In some instances, specialty equipment for road repairs or construction projects requires the movement of overweight, overwidth, or overheight loads utilizing a Village roadway. Such movement will require obtaining a permit from the Village Police Department's Traffic Supervisor.
- 3.1.4 **BARRICADES AND WARNING SIGNS.** The Contractor shall provide the Village with a telephone number of a person or company who is available 24 hours per day, seven days per week, to erect additional barricades or signs. If the Village or its representative deems it necessary for the Public's safety to erect additional barricades or signs during normal working hours, the Contractor will furnish the necessary barricades or signs, and have them in place within 30 minutes. If, after normal working hours, the requested signs are not in place within three hours after the request is made, the Village reserves the right to have the barricades and signs erected. The cost of erecting the barricades and signs shall be deducted by the Village from any payments due the Contractor.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

4. PROSECUTION AND PROGRESS

4.1 Section 108 of the SSRBC shall govern the prosecution and progress of the work, with the following additions:

- 4.1.1 The Contractor shall schedule his work such that all improvements shall be complete by **Friday, October 28, 2022**. The completion date will remain binding throughout the duration of the Contract unless revised in writing by the Village.
- 4.1.2 The total duration of disturbance for work related to means of public egress through the project site or access to private property (e.g. removal and replacement of curb and gutters, sidewalks, driveway entrances, etc.) must not exceed ten (10) calendar days. The Contractor may use high-early strength concrete, meeting all specifications herein, **at his own expense** to help meet this requirement.
- 4.1.3 The Contractor shall also make special note of the following work schedule requirements:
- 4.1.3.1.1 Sidewalk removal and installation shall be phased as follows. Portions of the intersection not listed to be done with the phase of work shall remain open for pedestrian traffic at all times.
- 4.1.3.1.2 Curb and gutter removal and installation shall be phased such that access to residential driveways on either the North side or South side of Otis Ave be maintained. Access shall not be simultaneously prohibited for residential driveways on both the North and South sides of Otis Ave.
- 4.1.4 Should the Contractor fail to complete the work on or before the specified completion dates set forth in Sections 4.1.1, 4.1.2, 4.1.3, or within such extended time as may be allowed, the Contractor shall be liable for liquidated damages in accordance with the applicable sections of Article 108.09 of the SSRBC. In addition, the Contractor shall be liable for additional costs incurred by the Village due to the delay for construction engineering services, which shall be deducted from the value of work completed.
- 4.1.5 Upon substantial completion of the project, the Engineer will deliver to the Contractor a punch list as well as a due date for completion of the punch list. If the Contractor fails to complete the punch list by the stated punch list completion date, the Contractor shall be liable for liquidated damages in accordance with the applicable sections of Article 108.09 of the SSRBC.
- 4.1.5 Prior to commencing construction, a meeting will be held with the Contractor and the Village. Any questions concerning procedures, general conditions, special provisions, plans or specific items related to the project shall be answered and clarified. No Pre-Construction meeting shall be scheduled until submittals, performance bonds, and certificates of insurance are delivered to, and approved by, the Village.
- 4.1.6 Weekly progress meetings may be required by the Village. If required, the Contractor shall have a capable person, such as a site superintendent or project manager, attend such meetings and be prepared to report on the prosecution of the Work according to the progress schedule. The Village reserves the right to require adjustments to scheduling of work.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

5. MEASUREMENT AND PAYMENT

5.1 Section 109 of the SSRBC shall govern measurement and payment, with the following additions:

5.1.1 Modifies Article 109.07 - Partial payments will be made per Section 36 of Part II of this document (Billing and Payment Procedures.)

5.1.2 The Village will require that partial and final affidavits for all labor, materials and equipment used on the Project and certified payroll records, be submitted with the partial and final payment requests. Such waivers shall indicate that charges for all labor, materials and equipment used on the project have been paid. Partial waivers from suppliers and subcontractors may be submitted after the first payment to the Contractor, and before the subsequent payment to that which they apply. However, partial waivers from the Contractor must accompany the invoice of the payment to which it applies. All final waivers, from all suppliers and subcontractors **MUST** accompany the Contractor's invoice upon submittal for final payment. A sworn statement by the Contractor shall accompany full waivers. Such requirement for full waivers is solely for the benefit of the Village and shall not be construed to benefit any other person. Partial payment for work done shall in no way imply acceptance of the work to that date.

5.1.3 For each progress payment made to the Contractor prior to acceptance of the Work by the Village, the Village shall have the right to retain ten percent (10%) of the amount due to the Contractor for each such payment. The Village may, in its sole discretion, reduce the amount to be retained at any time.

Typically, upon completion of 50% of the work, as determined by the Engineer, retainage may be reduced to 5%. Upon substantial completion, as determined by the Engineer, retainage may be reduced to 2%. Additionally, the Village has the right to withhold an amount of money equivalent to complete unfinished work and/or work that may need to be redone.

6. SCOPE OF WORK

6.1 In addition to the Special Provisions in the Detailed Specifications Section below, Section 104 of the SSRBC shall govern scope of work, with the following revisions:

6.1.1 Modify Article 104.02 as follows:

104.02 Alterations, Cancellations, Extensions, Deductions, and Extra Work.

The Department reserves the right to make, in writing, at any time during work, changes in quantities, alterations in work, and the performance of extra work to satisfactorily complete the project. Such changes in quantities, alterations, and extra work shall not invalidate the contract nor release the surety, and the Contractor agrees to perform the work as altered.

If the alterations or changes in quantities significantly change the character of the work under the contract, whether or not changed by any such different quantities or alterations, an adjustment, excluding loss of anticipated profits, will be made to the contract. The basis for the adjustment shall be agreed upon prior to the performance of the work. If a basis cannot be

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

agreed upon, then an adjustment will be made either for or against the Contractor in such amount as the Engineer may determine to be fair and equitable.

If alterations or changes in quantities do not significantly change the character of the work to be performed under contract, the altered work will be paid for as provided elsewhere in the contract. The term "significant change" shall be construed to apply only when the character of the work as altered differs materially in kind or nature from that involved or included in the original proposed construction ~~or when a major item, defined as an item whose total original contract cost plus any additions exceeds ten percent of the total original contract amount, is increased in excess of 125 percent or decreased below 75 percent of the original contract quantity.~~

All alterations, cancellations, extensions, and deductions shall be authorized in writing by the Engineer before work is started. Such authorizations shall set up the items of work involved and the method of payment for each item. The Contractor shall accept payment for alterations which result in an increase or decrease in the quantities of work to be performed according to the following.

(a) All increases in work of the type which appear in the contract as pay items accompanied by unit prices will, except as provided under paragraph (d) herein, be paid for at the contract unit prices. Decreases in quantities included in the contract will be deducted from the contract at the unit bid prices. No allowance will be made for delays or anticipated profits.

(b) Major items of work for which the quantities are increased ~~by not more than 125 percent or reduced to not less than 75 percent of the original contract quantities~~ OR DECREASED will be paid for as specified in paragraph (a) above. ~~Any adjustments for increased quantities for major items of work increased more than 125 percent shall only apply to that portion in excess of 125 percent of original contract quantities. Any adjustments made for major items of work which are decreased to less than 75 percent of the original contract quantities shall apply to the actual amount of work performed.~~

(c) Extra work which is not included in the contract as pay items at unit prices and is not included in other items of the contract will be paid for according to Article 109.04.

(d) Extra work for which there is a pay item at unit price in the contract which for any one or more of the following reasons materially increases or decreases the cost of the pay item as bid and which is not included in the prices bid for other items in the contract will be paid for according to Article 109.04. This includes:

- (1) Work involving a substantial change of location.
- (2) Work which differs in design.
- (3) Work requiring a change in the type of construction.

(e) In cases where the Department cancels or alters any portion of the contract items, items which are partially completed will be paid for as specified in Article 109.06.

Claims for extra work which have not been authorized in writing by the Engineer will be rejected.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

IV. SPECIAL PROVISIONS

The following Special Provisions shall modify, supersede, or supplement the Standard Specifications referred to in Section III - General Provisions.

Where any section, subsection, paragraph, or subparagraph of the Standard Specifications is *supplemented* by any of the following paragraphs, the provisions of such section, subsection, paragraph, or subparagraph shall remain in effect. The Special Provisions shall govern in addition to the particular Standard Specification so supplemented, and not in lieu thereof.

Where any section, subsection, paragraph, or subparagraph of the Standard Specifications is *amended, voided, or superseded* by any of the following paragraphs, any provision of such section, subsection, paragraph, or subparagraph standing unaffected, shall remain in effect. The Special Provisions shall govern in lieu of any particular provision of the Standard Specification so amended, voided, or superseded, and not in addition to the portion changed.

SP-1 SCOPE OF WORK

Description: The Otis/Grant/Florence Storm Sewer Improvements Project shall generally consist of the following:

- Construction of approximately 1260 linear feet of 12", 15", 18", 24" and 36" storm sewer.
- Full reconstruction of approximately 360 square yards of hot-mix asphalt roadway.
- Mill and overlay of approximately 3,600 square yards of hot-mix asphalt roadway.
- Construction of approximately 2,100 square feet of sidewalk.
- All other collateral work such as driveway replacements, curb and gutter replacements and restoration.

SP-2 GENERAL CONSTRUCTION REQUIREMENTS

Description: The following general requirements are intended to govern the overall priority for the performance of the work described in this contract. As general requirements, they are not intended to dictate to the Contractor the precise method by which these tasks shall be performed.

No more than three hundred linear feet (300 LF) of pavement may be open-cut and closed to use by the motoring public. Access to **all** individual drives within the current work zone must be restored at the end of each workday.

The Contractor shall maintain traffic flow on ALL STREETS during the day in accordance with the applicable special provision. Adequate signing and flagging is of particular importance for safe travel of all residents.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

SP-3 QUALIFICATIONS OF BIDDER

Description: In addition to those requirements set forth in Section 10.1 above, in order to be considered a responsible bidder, the bidder must have particular expertise in having successfully constructed projects of a similar size and scope, specifically including residential neighborhood street and utility removal and reconstruction. The Bidder must submit the following information for itself and for any major Sub-Contractors (Earthwork, Underground Utilities, Paving):

- a. Similar Project Experience
 - i. Bidder must provide detailed information regarding past similar projects performed by the submitting firm within the past five (5) years.
 - ii. Bidder must submit a list of references of previous projects identifying the location of the work, the dollar value of the work, the owner or agency responsible for the work, and the name and phone number of the contact person.
- b. Proposed Project Team – the Bidder must identify the project manager and full-time onsite construction supervisor (can be the same person) on the Certification of Qualifications form. Bidder must also provide qualifications of the project manager and full-time onsite construction supervisor. The individuals proposed must be utilized for the duration of this project unless an alternate is approved in writing by the Village.
- c. Bidder must completely fill out and submit the Certification of Qualifications form with the Bid.

SP-4 CONSTRUCTION STAKING AND RECORD DRAWINGS

Description: Section 5-7 of the Water and Sewer Specs shall be replaced in its entirety by the following:

The Contractor shall furnish and place all construction layout stakes for this project. Competent personnel with suitable equipment shall conduct this work, supervised by a licensed Illinois Land Surveyor. The Contractor shall be responsible for having the finished work conform substantially to the lines, grades, elevations and dimensions shown on the plans.

The Contractor shall provide adequate control points to construct the individual Project elements, and shall provide the Engineer with adequate control in close proximity to check the compliance of the elements constructed.

The Contractor shall record all field notes in standard survey field notebooks and those books shall become the property of the Village at the completion of the Project. All notes shall be neat, orderly and in an accepted format.

Prior to final payment and within 28 calendar days of substantial completion, as determined in section III.4.1.1, the Contractor shall provide the Village with record drawings showing the elevations of all constructed storm and sanitary sewer manholes, catch basins, inlets, clean-outs, and any other structures defined by the Engineer as part of the project, including all rim elevations, and invert elevations of all pipes.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Rim elevation of all curb structures shall be taken at the flowline of the gutter. Significant changes to the design plans shall also be depicted. Red-lined plans or electronically-generated as-built plans are acceptable. Digital copies of as-built drawings must also be provided (TIF files or approved equal), along with two full-sized paper copies. All work related to generating the as-built drawings shall be supervised by a licensed Illinois Land Surveyor.

Basis of Payment: This work will be paid for at the contract **LUMP SUM** price for:

CONSTRUCTION STAKING AND RECORD DRAWINGS,

which price shall be payment in full for the work as specified herein.

SP-5 EROSION AND SEDIMENTATION CONTROL

Description: Throughout each and every phase of the project, all downstream ditches and storm sewers shall be protected from the run-off of roadway surfaces, excavations, and other construction activities generating the movement of dirt, mud, dust and debris. This work shall consist of constructing temporary erosion and sedimentation control systems as shown on the plans or as directed by the Engineer. The work shall be placed by methods and with materials in accordance with Sections 280, 1080 and 1081 of the SSRBC, except as amended herein.

All downstream ditches shall be protected from erosion and sedimentation by the installation of silt fence ditch checks, straw bales shall not be used. Piles of excavated material and/or trench backfill material, allowed to be in place in excess of three days, shall be protected against erosion and sedimentation runoff by use of silt fence. Storm sewer inlet structures or manholes shall be protected by temporary placement of geotextile fabric, filter baskets, or solid lids, as authorized in the field by the Engineer.

Erosion and sedimentation control measures as indicated in the Erosion Control Plan, or as directed by the Engineer shall be installed on the project site prior to beginning any construction activities which will potentially create conditions subject to erosion. Erosion control devices shall be in place and approved by the Engineer as to proper placement and installation prior to beginning other work. Erosion control protection for Contractor equipment storage sites, plant sites, and other sites shall be installed by the Contractor and approved by the Engineer prior to beginning construction activities at each site.

Silt Fence: Placement, maintenance, and removal of silt fence at areas designated by the Engineer. The work shall be placed by methods and materials in accordance with Sections 280 and 1080 of the SSRBC, except as amended herein.

Basis of Payment: This work shall be considered **INCIDENTAL** to the project.

SP-6 PRECONSTRUCTION VIDEO

Description: This work shall consist of furnishing all materials and labor required to perform a video survey of the construction limits, adjacent right-of-way, and adjacent structures bordering the work. This shall include, but not be limited to, existing buildings, garages, pavements, curb and gutter, sidewalks, fences, trees and landscaping. Two (2) copies of the video shall be furnished to the Owner separately on two (2) flash drives in a format approved by the Owner. The video recording shall be performed by a reputable company meeting the approval of the Owner, in the presence of a representative of the Owner, and shall be performed

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

prior to the commencement of construction. The video survey shall serve as a basis for establishing damage that has occurred as a result of construction operations.

Basis of Payment: This work will be paid for at the contract **LUMP SUM** price for:

PRECONSTRUCTION VIDEO,

which price shall be payment in full for the work as specified herein.

SP-7 TRAFFIC CONTROL, MAINTENANCE OF TRAFFIC, DETOURS

Description: This item shall include the furnishing, installing, maintaining, relocating and removing of all traffic control devices and personnel used for the purpose of regulating, warning, or directing traffic during the construction of this project. All traffic control devices used on this project shall conform to the Standard Specifications for Traffic Control Devices and the Illinois Manual on Uniform Traffic Control Devices.

No waiving of these requirements will be allowed without prior written approval of the Engineer.

The Contractor shall protect all workers engaged in the project, and shall provide for safe and convenient public travel by providing adequate traffic control under all circumstances. Such circumstances may include, but not be limited to work performed along the route under construction, road closures for construction operations of any type, or when any section of the road is opened to traffic prior to completion of all work. The Contractor shall ensure that work zone in question is properly signed, barricaded and otherwise marked.

The contractor will be responsible for the proper location, installation, and arrangement of all traffic control devices during the period of construction. All open excavations shall be protected by Type I barricades equipped with working bi-directional flashing lights at each end of the excavation, as well as at 50-foot intervals between ends for excavations greater than 50 feet in length and weighted down by **one sandbag per each barricade**. All street closures shall be protected by Type III barricades equipped with working bi-directional flashing lights and weighted down by **eight sandbags per each barricade**.

The Contractor shall plan his work so that there will be no open excavations during non-working hours and that all barricades not necessary have been removed from the pavement during non-working hours.

In the event that one direction of vehicular travel must be closed, the Contractor has the option of setting up a detour route or using flaggers (minimum of two) to direct traffic around the work area. The Engineer shall approve proper signing and barricading of the detour route and lane closures, and shall issue written authorization prior to closure.

In the event that both directions of vehicular travel must be closed, the Contractor shall set up a detour route to direct traffic around the work area. The Engineer shall approve proper signing and barricading of the detour route and shall issue written authorization prior to closure.

The Contractor shall maintain his operations in a manner such that traffic flow shall not be substantially impeded during the construction of the proposed improvements. Where traffic must cross open trenches during a given work day, the Contractor shall provide steel plates at street intersections and driveways. Prior to the end of a given work day, the pavement surface shall be temporarily restored.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

No open excavation may be left overnight or on the weekend without the express written permission of the Engineer.

No street closure shall be permitted without the express written permission of the Engineer. No street closure may exceed 800 linear feet, nor be in effect from Friday night at 4:30PM to Monday morning at 9:00AM. Where it is necessary to establish a temporary detour, all the requirements of the Standard Specifications and MUTCD shall be met.

As the condition and location of the work changes, the Contractor shall maintain all traffic control devices and personnel engaged in traffic control, in a manner that will accommodate the changing particulars of the work at any given time. Advance warnings, detour and directional information and other controls or directions necessary for safe passage of traffic around the work site shall be reviewed and changed, if necessary, to meet the needs of the situation. Signage erected, but not necessary or proper for the situation ahead shall be covered or taken down. Barricading and signage shall be monitored by the Contractor on a daily basis to ensure that it meets the requirements for work zone safety for the conditions of the particular work being performed.

The Contractor shall provide a name and phone number of a responsible party capable of providing emergency service, 24 hours per day, for the duration of the Project.

Basis of Payment: This work shall be paid for at the contract **LUMP SUM** price for:

TRAFFIC CONTROL, MAINTENANCE OF TRAFFIC, DETOURS,

which price shall be payment in full for the installation and maintenance of proper traffic control to protect the work and public for the duration of the Project.

SP-8 STREET SWEEPING AND DUST CONTROL

Description: All roadway surfaces shall be kept free of dirt, mud, dust and debris of any kind throughout every phase of the project. Dirt, mud, dust and debris of any kind shall be removed from the roadway surface to the satisfaction of the Engineer by any one or combination of the following: approved mechanical sweeping equipment, manual labor, or other approved techniques.

Whenever ordered by the Engineer, especially for locations subject to a particularly high volume of traffic, the Contractor shall mechanically sweep the work site.

Basis of Payment: This work will be paid for at the contract unit price per **HOUR** for:

STREET SWEEPING AND DUST CONTROL,

which price shall be payment in full for the work as specified herein.

SP-9 ACCESS AND WATER SHUT-OFF NOTIFICATION

Description: If access to a driveway will be blocked, or water will be turned off, the Contractor shall give that resident or business proper written notification at least 24 hours in advance. The Contractor must provide them the opportunity to remove their cars from the drive or make other arrangements, and prepare for

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

any shutdown of the water system. Samples of written notices shall be submitted to the Engineer for approval.

In addition, the Contractor shall be responsible for notifying the resident or business verbally on the morning of any driveway closure, to ensure awareness of the lack of access.

Basis of Payment: This work shall be considered **INCIDENTAL** to the project.

SP-10 PARKWAY RESTORATION, SOD, SPECIAL

Description: This item shall be done in accordance with the applicable portions of Sec. 252 of the Standard Specifications and the following provisions.

As contract work progresses through the Village, parkway restoration work shall commence in a timely manner in areas where permanent placement of new curb and gutter, driveways, sidewalks, etc., has been completed. Under no circumstances shall the Contractor prolong final grading, shaping and sod placement so that the entire project can be permanently restored at the same time.

This work shall consist of the excavation, topsoiling and sodding from a minimum of one and one-half (1-1/2) feet to a maximum of three (3) feet behind or adjacent to all curbs, sidewalks and driveways removed and replaced during the course of construction or as directed by the Engineer. Restoration will also be performed on areas disturbed by storm sewer or culvert construction.

All topsoil to be used for parkway restoration shall be obtained from outside the limits of this improvement, transported to the site and placed at required locations to a minimum depth of 4". All materials shall meet the requirements of Art. 1081.05 of the Standard Specifications. All placement of topsoil shall meet the requirements of Sec. 211 of the Standard Specifications.

All placement of sod shall meet the requirements of Sec. 252 of the Standard Specifications.

Date of Completion: Date of completion for Parkway Restoration shall be in accordance with Section 108 of the Standard Specifications.

For that period prior to full parkway restoration, the Contractor shall backfill and grade all disturbed areas so as to insure the safety of the general public. Parkways shall be left in a safe, clean and usable condition conducive to foot traffic and to the satisfaction of the Village. The Contractor shall protect these unfinished areas against erosion and work to keep them weed free.

Basis of Payment: This work will be paid for at the contract unit price per SQUARE YARD for:

PARKWAY RESTORATION, SOD, SPECIAL,

which price shall be payment in full for any excavation and grading necessary, the furnishing, transporting and placement of all topsoil and sod and the full watering of sod. Unless otherwise directed by the Engineer restoration of disturbed parkways more than three (3) feet behind the back of curb or more than three (3) feet adjacent to newly constructed driveway or sidewalk or more than six (6) feet either side of the newly placed

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

storm sewer or pipe culvert will not be paid for separately but shall be considered incidental to the contract.

Supplemental watering shall be paid for at the contract unit price per unit for SUPPLEMENTAL WATERING.


SP-11 TREE PROTECTION

Description: Municipal Codes regarding trees, including tree protection requirements for public parkway trees, are located in Chapter 24 of the Downers Grove Municipal Code. Specifically, Municipal Codes 24-7 and 24-8 detail the public parkway tree protection sizes and fines for violations. The Village Forester shall approve all tree protection measures and any deviations. All tree protection measures and any deviations shall be noted in the contract specifications and on approved project plan sheets and permits using the guidelines listed below.

Tree protection shall include avoiding damage to the above ground tree branches and trunk, and the below ground root system and surrounding soil. Tree crowns and trunks shall not suffer any branch or bark loss. Roots shall be protected from compaction, storage of materials, severing, regrading of the parkway or excavation unless specifically noted on the project plan sheets.

The Critical Root Zone, or CRZ, is the area immediately surrounding a tree that must be protected from damage. In a municipal parkway setting with utilities and paved or concrete surfaces, the size of the CRZ has been adjusted to form a rectangle around the parkway tree trunk with minimum dimensions listed in the following table. The depth of the CRZ extends to 4 feet below the natural ground surface level.

<u>Parkway Tree diameter at 4.5'</u>	<u>Width street to property (min. curb to sidewalk)</u>	<u>Length along street street(minimum)</u>	<u>Depth</u>
0 – 12.0 inches	10.0 feet	10 feet	4 feet
12.1 – 24.0 inches	10.0 feet	20 feet	4 feet
24.1 or more inches	10.0 feet	30 feet	4 feet

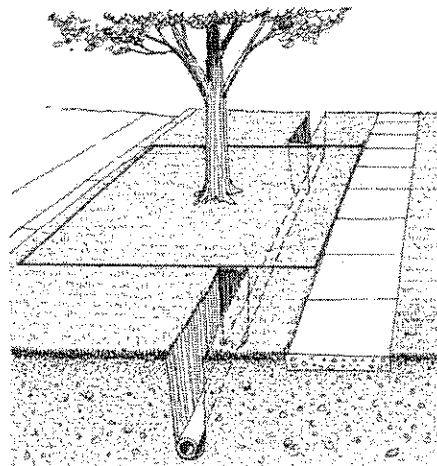

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

For projects that involve excavations of less than one (1) foot in depth in the parkway or street and are replacing structures in the same location, fencing of the public parkway trees shall not be required. Example projects include, but are not limited to, street pavement resurfacing, curb removal/replacement, driveway removal/replacement, or sidewalk removal/repairs or new sidewalk installations. Contractors shall be mindful of the CRZ dimensions and potential for fines if any parkway trees suffer any unauthorized damage as determined by the Village Forester.

For projects that involve excavations of two (2) or more feet in depth in the parkway or street or both, fencing of the public parkway trees shall be required. Example projects include, but are not limited to, watermain replacements with new roundway keystops and domestic service box installations, sanitary line replacements and new service connections, new or replacement natural gas services, new or replacement phone or fiber optic lines, or new or replacement storm sewers, or projects that widen roads which in turn decreases the parkway soil volume around public parkway trees.

Projects that require fencing (listed above) shall fence the public parkway trees with six (6) foot high chain link construction fence secured to metal posts driven in the ground which are spaced no further than ten (10) feet apart. The dimensions of the fence shall depend on the tree diameter size and shall follow the table listed for the CRZ above, or as large as practical dependent on driveways and other field conditions. The fenced rectangle shall have three (3) sides with the opening facing the adjacent residences for easy access for mowing or tree care. Under no circumstances shall any items be stored within the fence. All fence shall be maintained daily in an upright good condition. The size and location of all fencing shall be shown on the project plan sheets.

To avoid damage to the CRZ, utilities must be augered underneath the public parkway trees. Excavation pits for augering equipment are to be outside the fenced area and are to be shown on the project plan sheets. Excavation pits for roundway keystops and domestic service boxes are to be as small as practical with excavation occurring in a direction away from the adjacent public parkway tree.

In cases when severing of roots within a portion of the CRZ may be unavoidable (ex. sidewalk installation, curb replacement, water or sanitary service replacement), subject to the approval of the Village Forester, sharp clean cuts shall be made on root ends to promote wound closure and root regeneration. Root pruning and excavation activities shall occur such that the smallest volume of soil and roots is disturbed, and the locations shall be shown on the project plan sheets.

In addition to fines and citations that may be assessed for violations of any Chapter 24 of the Municipal Code (such as not maintaining fencing around the CRZ or unauthorized removal of protected trees), the contractor may be subject to the following provisions:

- issuance of an invoice for the value or partial value of the tree lost due to damage to either the above ground or below ground portions of the parkway tree, or unauthorized tree removal.
- costs of repairs, such as pruning or cabling, or costs for removal of the damaged parkway tree along with the stump if the tree cannot remain in the right-of-way.
- fines of \$500 for the 1st offense; \$1,000 for the 2nd offense; \$2,500 for the 3rd and subsequent offenses.
- each day during which a violation continues shall be construed as a separate and distinct offense.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

The value or partial value of the tree lost shall be determined by the Village Forester using the most current edition of the Guide for Plant Appraisal (prepared by the Council of Tree & Landscape Appraisers and the International Society of Arboriculture) and the most current edition of the Species Ratings & Appraisal Factors for Illinois (prepared by the Illinois Arborist Association). The total cost determined for the damage shall be deducted from the payments made to the Contractor for the project. Should the Village hire another Contractor or tree service to complete pruning work, these costs shall also be deducted from the payments made to the Contractor.

Basis of Payment: This work will be paid for at the contract unit price per **FOOT** for:

TREE PROTECTION,

which price shall be payment in full for the work as specified herein, except tree removal as defined by the standard specifications, which will be paid for separately.

SP-12 TREE PRUNING

Description: This work shall consist of pruning branches, for aesthetic and structural enhancement, of existing trees as shown on the plans or as directed by the Engineer. All pruning shall be done according to ANSI A300 (Part 1) – Pruning standard.

All trees designated to be saved shall be protected during clearing and subsequent construction operations. Overhanging limbs shall be pruned or cut off to provide a minimum vertical clearance of seven (7) feet from the finished surface.

Basis of Payment: Tree pruning will be paid for at the contract unit price per **EACH** tree for:

TREE PRUNING,

which price shall be payment in full for the work as specified herein and as measured in place.

SP-13 TREE ROOT PRUNING

Description: All trees, public or private, affected by new sidewalk installation within its root protection zone, shall be root pruned prior to any excavation taking place. Root pruning shall be performed in accordance with the Tree Protection Zone detail of the Plans, and shall be done only to the depth of the excavation necessary for installing the new sidewalk. Root pruning shall start and proceed uninterrupted for the length of travel through the root protection zone. Root pruning shall be made no more than 10 inches from the tree-side edge of the proposed sidewalk.

Approval by the Village Forester of the equipment to be used for root pruning, as well as the proposed path of the root pruning work, is required prior to the work being performed. The Engineer or his representative shall permit no excavation until written approval is obtained by the Contractor from the Village Forester. No materials or equipment may be stored or kept in the Tree Protection Zone. Tree damage, as determined by the Village Forester, shall be assessed to the Contractor using the most recent edition of the Guide for Plant Appraisal, published by the International Society of Arboriculture.

Basis of Payment: This work shall be paid for at the contract unit price per **FOOT** for:

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

TREE ROOT PRUNING,

which price shall be payment in full for the work as specified herein and as measured in place.

SP-14 TEMPORARY BITUMINOUS PATCH

Description: This item shall be used at locations where storm sewer installation is not complete, but the trench must be patched due to weather, high vehicular traffic concentrations, or the direction of the Engineer.

In these locations, three (3) inches of ‘Asphalt Cold Patch’, placed and compacted in one lift, shall be placed on the compacted CA-6 sub-base. This pavement shall be placed against a prepared saw-cut pavement. The surface of the finished patch shall be even with the existing finished pavement. Areas of pavement to be opened after November 15th shall be done so only with the approval of the Engineer. The maximum width paid for this item, shall be the maximum pavement replacement width permitted by the Standard Specifications for Water and Sewer Construction in Illinois, or as otherwise directed by the Engineer.

Basis of Payment: This work shall be paid for at the contract unit price per TON for:

TEMPORARY BITUMINOUS PATCH,

which price shall include all labor, material, and equipment necessary for furnishing, placing, maintaining, removing and disposing of the asphalt patching material surface used in the construction of temporary road surfaces. This item shall also include the maintenance of the temporary pavement.

SP-15 EARTH EXCAVATION, SPECIAL

Description: This work shall consist of the excavation, removal, and disposal of existing materials located on site, unless specifically called out by specific pay item. Removals include earth excavation and pavement removal. This work shall be as specified and in accordance with Sections 202, 20, 205 and 440 of the SSRBC and as specified herein.

Method of Measurement: This work will not be measured for payment. Payment will be based on Contract Quantities. By submission of a bid, Contractor agrees on Contract Quantity.

Basis of Payment: This work shall be paid for at the contract unit price per CUBIC YARD for:

EARTH EXCAVATION, SPECIAL,

which shall include all labor, materials and equipment necessary to do the work.

The removal and disposal of unsuitable materials (undercut) to allow PGE to be installed below the pavement sub-base as necessary and as directed by the Engineer will be paid for separately at the contract unit price per CUBIC YARD of REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL.

SP-16 COMBINATION CURB AND GUTTER

Description: This work shall consist of the placement of P.C.C. Curb and Gutter of the type and size at the locations noted on the plans. This work shall be performed in accordance with Section 606 of the

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Standard Specifications, except as amended herein.

Transverse expansion joints with ¾" joint filler shall be constructed at five feet (5') either side of utility structures, and at no more than ninety foot (90') intervals. All expansion joints shall include the placement of two (2) three-quarter inch (¾") dowel bars with pinched stop caps as specified on detail sheet. Two (2) three quarter inch (¾") dowel bars shall also be placed at all construction joints as specified on detail sheet.

New curb and gutter shall be backfilled with existing excavated earth.

Placement of P.C.C. Curb and Gutter shall include the following:

- a) The placement and compaction of four inches (4") of Subbase Granular material, Type B, CA 6 with the methods and with materials in accordance with Section 311 and of Article 1004.04 of the SSRBC;

Transverse contraction joints shall be constructed at no more than fifteen foot (15') intervals.

All voids existing between newly placed curb and gutter and the adjacent roadway pavement shall be filled with Class SI concrete, prior to bituminous surface placement, to a point 1-1/2 inches below finish grade. This work shall be considered incidental.

Placement of curb and gutter shall include the application of membrane curing compound, Type III, in accordance with Articles 1020.13 and 1022.01 of the Standard Specifications unless otherwise directed by the Engineer.

If placement of curb and gutter takes place prior to April 15, or after October 15, the curb and gutter shall be properly cured and that followed by the application of protective coat in accordance with Article 420.18 of the Standard Specifications.

Basis of Payment: This work will be paid for at the contract unit price per **FOOT** for:

COMBINATION CURB AND GUTTER,

which price shall be payment in full for the work as specified herein.

SP-17 TEMPORARY SURFACE OVER TRENCH – (AGGREGATE)

Description: This work shall consist of construction, maintenance, and removal of an aggregate surface course for temporary roads and approaches as specified in Section 107.09 of the SSRBC. The depth of the temporary surface over trench shall equal the depth of the adjacent existing pavement.

Construction Requirements:

Aggregate surface shall be constructed in accordance with the applicable portions of Section 402 of the SSRBC, except that the equipment required for the work will be as directed by the Engineer. Maintenance shall consist of placing and compacting additional aggregate of the same type and gradation as the surface aggregate.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Materials:

Aggregate used for temporary access shall be of CA-6 gradation and shall meet the requirements of Section 1004.04 of SSRBC, except the use of crushed concrete and slag will not be allowed. The top portion of the temporary aggregate surface will be capped with four inches (4") of bituminous grindings to assist with dust control.

When the use of the aggregate for temporary roads and approaches is discontinued, the surface aggregate placed in its construction and maintenance shall be removed and either utilized in the permanent construction or otherwise disposed of as specified in Section 202.03.

Basis of Payment: This work shall be paid for at the contract unit price per **SQUARE YARD** for:

TEMPORARY SURFACE OVER TRENCH – (AGGREGATE),

which price shall include all the labor, material, and equipment necessary for furnishing, placing, maintaining, removing and disposing of the aggregate surface or the bituminous patching material surface with aggregate sub-base, used in the construction of temporary road and drive approach surfaces. These items shall also include the maintenance of the temporary pavement.

SP-18 AGGREGATE SHOULDERS, TYPE B

Description: This item shall be done in accordance with Sec. 481 of the SSRBC and shall consist of the construction of approximate two (2) foot wide, four (4) inch deep shoulders or as directed by the Engineer in the area designated by the Engineer.

Unless otherwise directed by the Engineer, existing shoulders with elevations that are too high to accept the proposed aggregate shoulder shall be scraped or excavated as necessary prior to placement of new aggregate. This provision shall also apply to existing shoulders that contain too much vegetation or topsoil. Unnecessary damage or debris outside the designated shoulder area shall be removed and repaired and will not be paid for separately but shall be considered incidental to the cost of Aggregate Shoulders, Type B.

Basis of Payment: This work will be paid for at the contract unit price per **SQUARE YARD** for:

AGGREGATE SHOULDERS, TYPE B,

which price shall be payment in full for the work as specified herein.

SP-19 HOT-MIX ASPHALT DRIVEWAY REMOVAL & REPLACEMENT, 3"

Description: This work shall consist of the removal and replacement of asphalt driveways at locations indicated on the plan and/or as required by the Engineer.

The replacement of the driveways shall consist of preparing a subgrade at all required locations, shaping of slopes adjacent to the driveways, the placement and compacting of six inches (6") of CA-6 Aggregate Base, and the placement and compacting of three inches (3") of Hot-Mix Asphalt Surface, Mixture D, N50 (IL 9.5).

This work shall also include the adjustment to proper grade of all water valve or private utility boxes encountered.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

The locations at which this work will be measured for payment will consist of only those areas bounded by P.C.C gutter or shoulder. Those areas where the surface course of the pavement flares into existing driveways beyond the limits of the fully improved areas will not be included for payment.

Basis of Payment: This work shall be paid for at the contract unit price per **SQUARE YARD** for:

DRIVEWAY REMOVAL and HMA DRIVEWAY, 3",

which price shall be payment in full for the work as specified herein.

SP-20 PORTLAND CEMENT CONCRETE SIDEWALK

Description: This work shall consist of installation of new P.C.C. sidewalk as indicated by location or shown on the plans. All P.C.C. sidewalks shall be placed by methods and with materials in accordance with Articles 424 and 1020.04 of the SSRBC, except as amended herein.

Excavation for new sidewalk shall be performed with a Gradall. Operating a Gradall on the parkways will not be allowed. All excavation shall be made from the street unless otherwise approved by the Engineer. Excavation work utilizing a skid steer loader shall not be allowed.

Placement of sidewalk shall include the following:

- a) Any necessary excavation, clearing, and proper disposal of excavated materials, removal and disposal of all obstructions such as fences, walls, foundations and buildings;
- b) The placement and compaction of four inches (4") of Subbase Granular material, Type B, CA 6 with the methods and with materials in accordance with Section 311 and of Article 1004.04 of the SSRBC;
- c) The set up of form work such that the maximum running slope of the finished walk does not exceed 5 percent (1:20) or not to exceed the general grade established for the roadway, and the cross slope is not more than 2 percent (1:50).
- d) The placement of five inch (5") thick, Class SI Portland Cement Concrete, 5.65 cwt/cy mix, with 5-8% air entrainment, 2"-4" slump, and six inch (6") thickness through or in residential driveways or where subject to vehicular traffic, to the width specified on the plans or as directed by the Engineer;
- e) The tooling of contraction joints, 3/4-inch radius and 1 inch deep, 5 feet on center;
- f) The placement of 1/2 inch thick premoulded expansion joints at 50 foot intervals on center, or abutting existing concrete sidewalk, or at the end of a pour;
- g) The adjustment to proper grade of all utility structures encountered;
- h) For sidewalks passing over newly constructed utility trenches, three equally spaced epoxy coated No. 4 reinforcing bars shall be centered over all utility trenches. Bars shall extend a minimum of 5 feet (1.5 m) beyond the walls of the utility trench. Reinforcement shall be incidental to the cost of the pay item.
- i) The replacement of all traffic control devices or parking meters removed;
- j) The proper curing of all concrete work utilizing methods and materials outlined in Articles 424 and 1022.01 of the SSRBC, (Type III membrane curing compound white pigmented);
- k) The complete restoration of abutting asphalt driveways damaged as a result of installation, or where new sidewalk surface is more than 1/2 inch higher or lower than the original grade of the asphalt drive. Restoration shall consist of a minimum of one foot either side of the

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

sidewalk; with a minimum of three inch (3”) thick Hot-Mix Asphalt Surface, Mixture D, N50 (IL 9.5) surface course; and restoration of gravel drives with similar HMA restoration.

- l) Installation of ADA compliant ramps for curbed and non-curbed streets.

Except for damaged parkway areas due to rutting or not designated by the Engineer, restoration will be paid for in accordance with the specification **PARKWAY RESTORATION**.

When sidewalks are closed to pedestrians a minimum of two barricades (one on either side of the work zone) shall be used.

Basis for Payment: This work shall be paid for at the contract unit price per **SQUARE FOOT** for:

P.C.C. SIDEWALK, 5 INCH and P.C.C. SIDEWALK, 6 INCH,

which price shall be payment in full for the work as specified herein.

SP-21 STORM SEWERS (CLASS, MATERIAL, SIZE SPECIFIED)

Description: This item shall consist of the construction of Storm Sewer. Storm sewer shall be constructed with new Reinforced Concrete Pipe (RCP) per the SSRBC (AASHTO M315), and Ductile Iron Pipe with gasket (DIP), AWWA C -1 Class 52 with SuperCoat interior lining, asphalt exterior coating, and rubber-gasketed joints AWWA C – 111 of the diameter shown, or Polyvinyl Chloride (PVC) Pipe SDR 26 with gasketed, bell and spigot, push on type joints conforming to ASTM D3212 of the diameter shown on the Drawings.

The pipe shall be placed so that the entire length of the pipe will have full bearing. No blocking of any kind shall be used to adjust the pipe to grade except when used with concrete encasement.

Laying of sewer pipe shall be accomplished to line and grade in the trench only after it has been de-watered and the foundation and/or bedding has been prepared. Mud, silt, gravel, and other foreign material shall be kept out of the pipe and off the jointing surface.

All pipe laid shall be retained in position so as to maintain alignment and joint closure until sufficient backfill has been completed to adequately hold the pipe in place. All pipes shall be laid to conform to be prescribed line and grade shown on the Plans.

The sewer pipe, unless otherwise approved by the Engineer, shall be laid up grade from point of connection on the existing sewer or from a designated starting point. The sewer pipe shall be installed with the bell end forward or upgrade, unless approved otherwise. When pipe laying is not in progress, the forward end of the pipe shall be kept tightly closed with an approved temporary plug.

If deemed necessary by the Engineer, all pipe and manholes shall pass an ex-filtration test in accordance with ASTM C-969-02 prior to acceptance. All testing shall be done under supervision of the Engineer, who shall be notified 48 hours prior to testing.

The following specific items shall be considered incidental to storm sewer pipe construction and their costs shall be merged into the contract unit price per **FOOT** of the storm sewer pipe.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

1. Removal of all surplus trench excavation from site.
2. Excavation for and placement of bedding material.
3. Support of trenches, including any necessary bracing or shoring.
4. De-watering of trench or excavation.
5. Placement and compaction of backfill by vibratory plate or other approved mechanical device.
6. Coring into existing drainage structures where connections are called for on the plans.
7. Sawcutting of pavement and/or curb and gutter.

Basis of Payment: This work shall be paid for at the contract unit price per **FOOT** for:

STORM SEWERS (CLASS, MATERIAL, SIZE SPECIFIED),

which price shall include all labor, material, and equipment and incidental work herein specified, except **TRENCH BACKFILL** used as Final Backfill as defined by the Standard Specifications, which will be paid for separately.

SP-22 DETECTABLE WARNINGS

Description: This work shall consist of the installation of new detectable warning material as shown in the plans. All detectable warnings shall be placed by methods and with materials in accordance with Article 424 and 424.09 of the SSRBC.

Detectable Warnings shall be brick red, cast-in-place composite panels with inline dome pattern. Panels shall be installed full width of the walk (2" max concrete border allowed) in accordance with the latest PROWAG guidelines and at the direction of the Public Works Director (or his/her designee).

Detectable Warnings shall be Access-Tile Cast-In-Place Replaceable, or equivalent equal.

Basis for Payment: This work shall be paid for at the contract unit price per **SQUARE FOOT** for:

DETECTABLE WARNINGS,

which price shall include all material, labor, and equipment necessary to complete this item.

SP-23 MANHOLES, CATCH BASINS, AND INLETS (SIZE AND TYPE SPECIFIED)

Description: This work shall consist of the installation of precast concrete drainage structures with a cast-in, clamp-on type flexible boot meeting ASTM C923 requirements, of the size and type shown on the plans or specified by the Engineer. Included in the contract unit price shall be all excavation, removal and disposal of existing storm structures, bedding, supplying and compacting of backfill materials. Backfill materials for new structures shall be CA-6 aggregate mechanically compacted. Unless otherwise specified, all manholes, catch basins, and inlets and shall be their respective Type A design with cast-in-place, clamp-on type, flexible rubber boot(s).

All structures in excess of four feet in depth shall be equipped with cast iron steps meeting the standards of ASTM A48.

Precast sections shall conform with ASTM C 478 and shall be substantially free from fractures, large or deep

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

cracks and surface roughness. Slabs shall be sound and free from gravel pockets. Joints between precast sections shall be designed for rubber gaskets or bituminous mastic material.

Adequate foundation for all structures shall be obtained by removal and replacement of unsuitable materials with well graded granular material; or by tightening with coarse ballast rock, or by such other means as provided for foundation preparation of the connected sewers.

Precast base sections shall be placed on a well graded granular bedding of not less than two (2) inches in thickness. The bedding course shall be firmly tamped and made smooth and level to assure uniform contact and support of the precast element.

Prefabricated benches in structures will not be allowed. Benches shall be poured after installation.

All lift holes shall be completely filled with mortar to ensure water tightness.

Castings shall be set in mortar or bituminous mastic beds. The adjustment of the casting to the required final grade shall be made with precast concrete adjusting rings. Maximum adjustment with rings shall be twelve inches (12"). Brick, concrete block, or wooden shims will not be permitted. Pre-cast concrete adjusting rings shall be set in mortar or bituminous mastic beds.

In pavements, frames shall be heavy duty Type 1 with either Type B closed lids or Type 11 frame and grates.

This work will be paid for at the contract unit price per **EACH** for:

MANHOLES, CATCH BASINS, and INLETS (SIZED AND TYPE SPECIFIED),

which price shall include all material, labor, and equipment necessary to complete the work.

SP-24 TRENCH BACKFILL

Description: All trenches and excavations under or within 2' of paved areas or structures, as shown on plans or as directed by the ENGINEER in the field, will require aggregate Trench Backfill.


Materials: Trench Backfill, as defined in the Water and Sewer Specs, shall consist of Final Backfill, Initial Backfill, Haunching and Bedding (see detail within this special provision). Allowable aggregate gradations, as defined in Sections 1003 and 1004 of the SSRBC, shall be as follows:

- Final Backfill: CA-6 or FA-6
- Initial Backfill: CA-6 or FA-6
- Haunching: CA-7
- Bedding: CA-7

All trench backfill material shall be placed and compacted in accordance with Section 550.07 of the SSRBC. Per the SSRBC, compaction Method 3 (jetting) of Initial Backfill and Final Backfill shall not be used with CA-6 material. Compaction Method 3 (jetting) of Initial Backfill and Final Backfill shall only be used with FA-6 material. Per the SSRBC, trench backfill material that has been compacted with Method 3 (jetting) shall be allowed to settle and dry for at least 10 days before any pavement or structure is placed above it.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

All backfilling shall be done in accordance with Section 20-4.06 of the Water and Sewer Specs. All trenches and excavations not under or within 2' of paved areas or structures shall be backfilled by any acceptable method which will not dislodge or damage the pipe, or cause bridging action in the trench. In turf areas, Trench Backfill shall consist of Initial Backfill, Haunching and Bedding and the balance of the backfill may be approved excavated material.

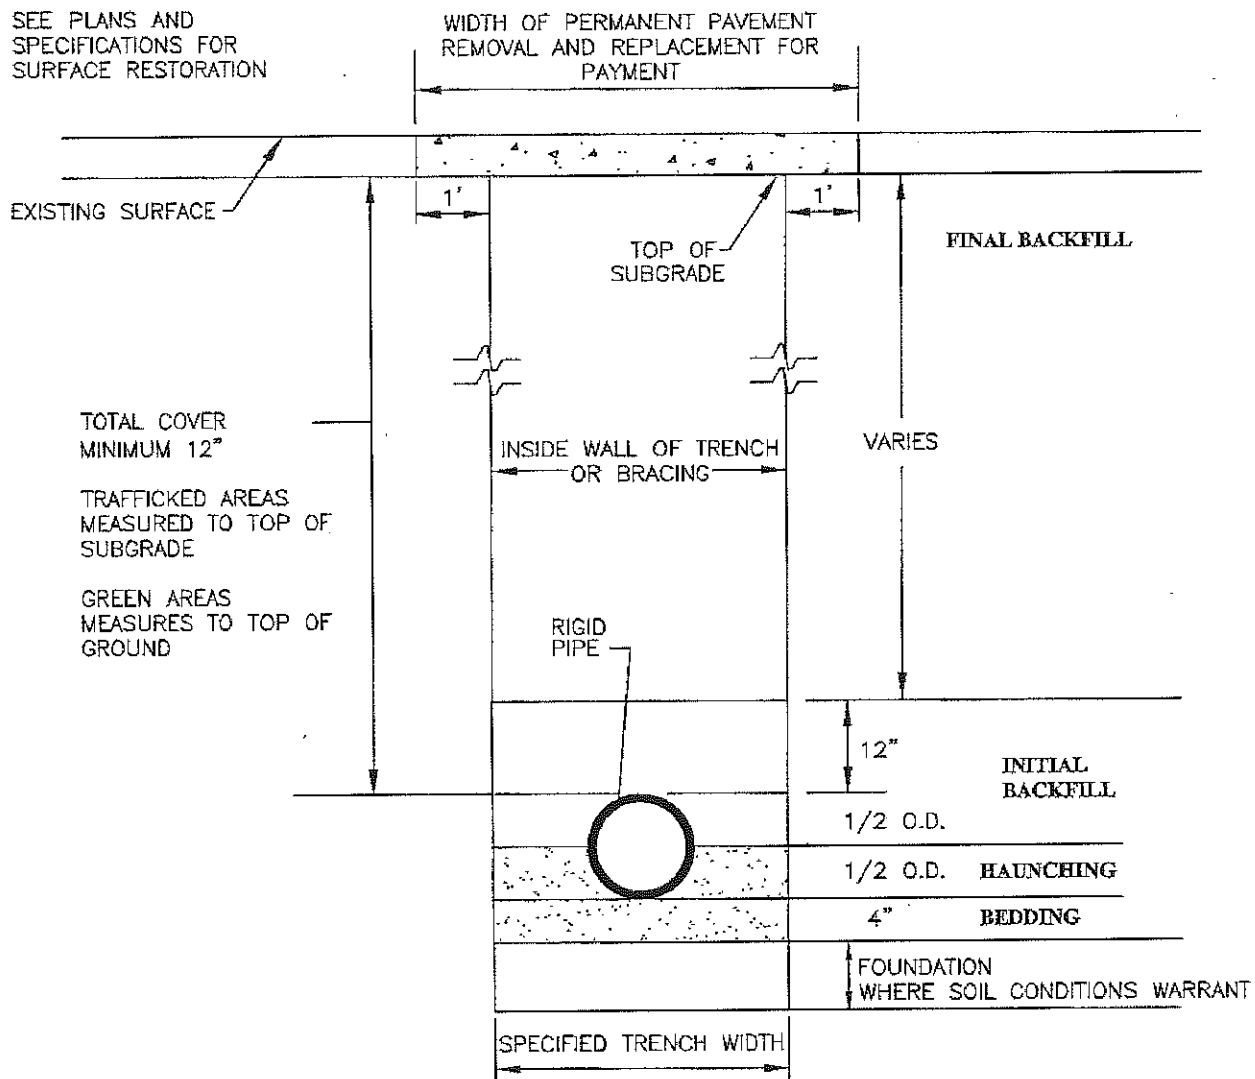

Basis of Payment: Payment shall be made for the furnishing and placement of Final Backfill only as defined in the Water and Sewer Specs. Furnishing and placement of Bedding, Haunching and Initial Backfill shall be considered incidental to the contract price for installation of the utility pipe. Final Backfill will be measured in cubic yards in place, except that the quantity for which payment will be made shall not exceed the volume of the trench as computed by using the maximum width of trench permitted by the SSRBC. Trench Backfill material exceeding of the maximum quantity herein specified shall be furnished by the CONTRACTOR at his own expense. Disposal of the surplus excavated material that is replaced by Trench Backfill shall be

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

incidental to payment for Trench Backfill. This work will be paid for at the contract unit price per **CUBIC YARD** for

TRENCH BACKFILL

which shall be payment in full for the work as specified herein and as measured in place.

SP-25 IEPA CLEAN CONSTRUCTION OR DEMOLITION DEBRIS

Description: If construction activities will result in removal and disposal of excavation spoils, per Illinois Public Act 96-1416 and the Illinois Environmental Protection Agency, soil sampling and analysis, along with certification from a licensed professional engineer (PE) or licensed professional geologist (PG) that the soil is uncontaminated, will be required prior to clean construction and demolition debris (CCDD) facility acceptance. However, if the subject property has never been used for industrial or commercial purposes, and is not adjacent to Potentially Impacted Properties (PIP's), then the site owner or operator may certify that the soil is uncontaminated by use of IEPA form LPC-662.

To facilitate meeting the above requirements, the Village will supply a signed LPC-663 or LPC-662 form. Neither the LPC-663/662, nor the report shall be considered a guarantee that excavated material shall meet the requirements of Illinois Public Act 96-1416, and the Contractor shall be responsible for satisfactory removal and disposal of all material as specified herein. No additional environmental testing of the existing on-site material may be performed without prior written permission from the Engineer. In the event that Contractor performs any additional testing without the written permission of the Engineer, Contractor will be required to properly and legally dispose of all material from the project site, regardless of its suitability for disposal in a CCDD facility, at his own expense, without any additional payment for testing, hauling and disposal as specified below.

The Village anticipates that one or more of the following CCDD facilities will accept material from this project:

- Reliable Lyons CCDD, 4226 Lawndale Ave, Lyons, IL 60534
- Hanson Material Service, 125 N Independence Blvd Romeoville, IL 60446
- Bluff City Materials, 1245 Gifford Rd, Elgin, IL 60120
- Vulcan Materials, 5500 Joliet Rd, McCook, IL 60525
- Heartland Recycling Aurora CCDD, Mettel Rd, Aurora, IL 60505

Contractor shall consult with these facilities prior to submitting a bid for this project. Contractor shall base his bid on hauling all CCDD generated by this project to these facilities. No additional compensation will be allowed for hauling to any other facilities, for any reason, unless none of the above listed facilities will accept the material. If an alternate facility was approved by the Village prior to bid submittal, and that facility will no longer accept the material, the facilities listed above shall be used by the Contractor at no additional cost to the Village, unless none of the above facilities will accept the material. In the case where neither any of the above listed facilities, nor a pre-approved alternate facility, will accept the material, the Village and Contractor shall attempt to locate an alternate facility, unless the material is classified as unsuitable for disposal in a CCDD facility, in which case it shall be hauled to a landfill and paid for as specified below. Should the Contractor wish to haul material to an alternate facility, the name, location and contact information for the proposed facility shall be submitted to the Village for evaluation, a minimum of five (5)

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

calendar days prior to submission of a bid. Any costs associated with additional sampling, analysis, and/or reporting to meet the acceptance requirements of the alternate facility shall be borne by the bidding Contractor and included within the Contractor's bid. By submitting a bid, Contractor agrees that at least one (1) of the above listed facilities, or an alternate facility approved by the Village in writing prior to the submission of the bid, will accept the material and shall be used for disposal of all CCDD from this project, unless otherwise determined to be non-hazardous special waste as specified below. In the event that the Contractor needs to alter the CCDD facility used for placement of excavated material, the Contractor shall notify the Engineer no later than three (3) days in advance of the planned alteration. In no event shall material be hauled to an alternate facility without the written permission of the Engineer.

Construction Requirements: The Contractor shall be responsible for satisfactory removal and disposal of all waste material, asphalt, concrete, stone, dirt, and debris generated or discovered in the course of the work. Removal and disposal of excavation items being disposed of at a clean construction and demolition debris (CCDD) facility shall meet the requirements of Public Act 96-1416. This work shall be incidental and shall not be paid for separately, with the exception of the **ADDITIONAL HAULING SURCHARGE, NON-HAZARDOUS SPECIAL WASTE** as specified below.

The temporary storing of excavated materials within the public right-of-way or project limits shall not be allowed unless approved by the Engineer. It shall be the Contractor's responsibility to find an approved dumpsite for debris and any excavated materials. The Village will not provide one.

The Contractor shall employ a licensed testing firm, as approved by Engineer, to screen each truck-load of material on-site, using a PID or FID field screen or other acceptable method. The PID shall be calibrated on a daily basis. The Contractor shall enter all truck-loads leaving the site into an on-site screening log including, but not limited to, project name, date, time, weather conditions, name of screener, hauling company, truck number, screening method, background PID reading, calibrated PID reading, truck/bucket PID reading, and description of materials screened. Each day prior to the first truck leaving the site, Engineer and Contractor's testing consultant shall agree on the allowable PID reading in accordance with the receiving CCDD facility procedures (typically 0.0 or daily background levels). The receiving CCDD facility may be consulted daily, or periodically, as needed to verify that the appropriate value is being used. If said screen indicates levels that will be unacceptable for disposal at the CCDD facility, the material shall be quarantined on-site for further evaluation. If material is rejected at the CCDD facility, it shall be returned to the project site and quarantined for further evaluation. No additional compensation shall be allowed for returning a rejected load back to the project site, or any other additional hauling, loading, unloading, etc, as may be required. Should it be determined by the Village or Village's agent that the material is not suitable for disposal in a CCDD facility, the Contractor shall be responsible for properly disposing of the material at an acceptable landfill, and providing the Village with all of the proper paperwork to document the material disposal with the IEPA. This work shall be paid for as specified below. If a truck-load is rejected by a CCDD facility after leaving the project site, and said truck-load is not identified in the on-site screening log, the Contractor shall still be required to properly dispose of the material and provide the Village with the necessary documentation, but shall not be additionally compensated as specified below.

All additional work to satisfy these requirements shall be the responsibility of the Contractor. All costs associated with meeting these requirements shall be paid for as specified herein. These costs shall include but are not limited to all required testing, lab analysis, and certification by a licensed professional engineer (PE) or licensed professional geologist (PG), if required, in addition to the cost of additional hauling, dump fees,

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

etc. Payment for this work shall be in addition to payment for EARTH EXCAVATION per the contract unit price. No adjustment to the contract unit price will be allowed due to changes to quantities based on actual field conditions.

Basis of Payment: This work shall be paid for at the contract unit price per **LOAD** for **ADDITIONAL HAULING SURCHARGE, NON-HAZARDOUS SPECIAL WASTE** which price shall be payment in full for the work as specified herein.

SP-26 UNDERCUTTING FOR UTILITIES

Description: This work shall consist of the excavation and disposal of unsuitable material during the construction of proposed utilities and backfilling with compacted CA-7. This work shall only be performed at the locations identified on the plans or designated by the Engineer. The Contractor shall notify the Engineer before commencing the work in order to permit accurate measurements. Any undercut and backfill performed before measurements have been made will not be paid for.

Method of Measurement: This work shall include all excavation required to remove unsuitable material as directed by the Engineer, except those portions paid for as pavement removal and/or combination concrete curb and gutter removal.

Basis of Payment: The excavation, disposal and replacement of unsuitable material from utility trenches will be paid for at the contract unit price per **CUBIC YARD** for:

UNDERCUTTING FOR UTILITIES

which price shall include all labor, material, backfill, and equipment necessary to complete the work specified herein.

SP-27 REMOVE AND REPLACE CULVERT

Description: In locations where existing driveway culverts are removed due to roadway widen or driveway apron replacement, or in locations shown on the plans, the contractor shall remove and replace the existing culvert. The contractor is responsible for insuring the culvert maintains positive drainage once it has been replaced. This work will include all labor, equipment, materials, and backfill necessary to remove and replace the culvert of the diameter shown on the plans along with the existing end sections.

Basis of Payment: This work will be paid for at the contract price per **EACH** for,

REMOVE AND REPLACE CULVERT,

which price shall include all work described herein.

SP-28 RE-GRADE DITCH LINE

Description: This item shall consist of the excavation and shaping of existing or proposed ditch lines as shown on the plans or directed by the engineer. The ditches will be 1-3 feet deep depending on elevations of adjacent structures and culverts. All ditches will be completed to allow for positive drainage to proposed

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

structures and culverts. All excavation, shaping and disposal of excavated material will be included. Parkway restoration will be paid for separately under the appropriate bid item.

Basis of Payment: This work will be paid for at the contract unit price per **FOOT** for:

RE-GRADE DITCH LINE

which price shall include all the labor, material, and equipment necessary for the work described herein.

SP-29 EXPLORATORY TRENCH

Description. This item shall consist of excavating an area for the purpose of locating existing utilities within the construction limits of the proposed improvement. This work shall be performed as directed by the Engineer. A nominal quantity of exploratory excavation has been included in the schedule of prices for the purpose of establishing a unit price for this item of work.

After the excavation has been inspected, it shall be backfilled as directed by the Engineer. If it is located in a paved area (existing or proposed), the excavation shall be backfilled with Selected Granular Backfill as specified herein. Otherwise, the excavation shall be backfilled with excavated material compacted to the satisfaction of the Engineer. Any excess material shall be disposed of in accordance with Article 202.03 of the IDOT Standard Specifications.

Granular Backfill will not be measured for payment.

Exploratory excavation will be measured in its original position and the volume calculated in cubic yards based upon the dimensions of the excavation ordered by the Engineer. Selected Granular Backfill will not be measured for payment.

Basis of Payment: This work will be paid for at the contract unit price per **CUBIC YARD** for,

EXPLORATORY TRENCH, SPECIAL

measured as specified, which price shall include excavation, backfill and legal disposal of excess material.

SP-30 WATER SERVICE REPLACEMENT

Description: All 1-1/2 inch or 2 inch services requiring replacement shall be replaced from the main to the B-box and shall include a new B-box and Roundway.

Any work performed on a potable water supply shall be done under the direction of a plumber licensed by the State of Illinois. The contractor shall furnish the Engineer with the plumber's license number prior to starting any work on any potable water supply.

For those service lines unable to meet the required clearances from sanitary or storm sewers, casing pipe shall be installed around the service line to the limits called for by the Water and Sewer Specs. Service line encasement shall be installed from the auger pits, and shall not entail open cutting an existing street pavement not otherwise disturbed in the process of installing the replacement water main.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

The new water service shall be encased whenever the horizontal and vertical separation of the new service from existing storm or sanitary sewers or services cannot be maintained. The new service shall be encased on each side of the crossing until the perpendicular distance from the end of the casing to the storm sewer or sanitary sewer or service is at least ten feet. Casing pipe shall consist of a minimum 4 inch diameter PVC SDR-26 Pipe. Encasement of water services shall be incidental to the price of the water service replacement.

The Engineer reserves the right to require the replacement of additional services; however, services replaced due to damage caused by the Contractor's operations shall not be paid for under this or any other item.

The service line shall be of one (1) inch, one and one-half (1 1/2) inch, or two (2) inch type K (soft) copper tubing as noted on plans or directed by Engineer. All copper connections shall be made with compression-type joints. All water service lines shall have a minimum five (5) foot of cover. The water service shall have no splices.

The corporation stop shall be Ford FB-600 or approved equal and shall be installed by tapping the water main with an approved tapping machine. The tap shall be made in the upper third of the main, as close to a 45-degree angle as is practical. The tap shall be made through a full circle stainless steel tapping saddle of the correct size depending on diameter of water main and size of new service tap. The tapping saddle shall be one of the following: Cascade Style CNS2 epoxy coated, double strap, ductile iron saddle or Cascade Style CS22 wide double band saddle or Ford FCD202, or Ford FS323. The roundway key stop shall be Ford B44, with a buffalo style size 100E (6') or 94E (5') service box. Only cast iron buffalo style boxes and lids will be allowed. The roundway keystone and buffalo box shall be located within the parkway area seven feet (7') from the property line or as close to that distance as possible from the property line, unless directed otherwise by the Engineer. The cover of the buffalo box shall have the word "WATER" cast thereon. The Contractor shall record the location of each buffalo box in relation to the nearest corner lot line, and the tap in relation to the nearest fire hydrant. Two copies of this record shall be filed with the Village prior to final inspection and final payment. No buffalo-box shall be located in a driveway or in the sidewalk without the approval of the Engineer.

No splices of any kind will be allowed in the water service line from the corporation stop to the roundway key stop. There shall be no splice from the roundway key stop to the water service meter unless specifically authorized by the Village.

For locations where a sample station is called out on the plans the contractor will install the 3/4" water service to a b-box. From the b-box the contractor will install a sample station. The sample station will be provided by the Village. All necessary material needed to make the connection from the b-box to the sample station shall be included in the price of installation.

Prior to final inspection, the Contractor shall see that all water appurtenances are adjusted to grade and clearly visible.

All Materials and Methods used shall comply with the above specifications.

Basis of Payment: This work will be paid for at the contract unit price **EACH** for:

WATER SERVICE REPLACEMENT

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

which price shall include all excavation, materials, augering, PVC-SDR-26 Casing Pipe and backfilling necessary to complete this item. Restoration, pavement or driveway replacement, topsoil, and sodding, will be paid for separately.

However, it is expected that all services shall be augered under street pavements not otherwise disturbed by the installation of the main or encumbered by the separation requirements from storm and sanitary sewers.

SP-31 ADJUSTING SANITARY SERVICE LINES

Description. This work shall consist of adjusting (replacing) sanitary service lines required where the proposed storm sewer is in direct conflict with the existing sanitary service line in accordance with Section 563 of the Standard Specifications and as specified herein, with the exception that adjustments (replacements) shall be constructed in addition to the “Sewer and Water Specs” per the Downers Grove Sanitary District’s specifications for sewer construction, and that this item will be paid for per EACH adjustment. **Excavation, removal of excavation from site, support of trenches, material (pipe, fittings, etc.), trench backfill, compacting of trench backfill, and all other items required to perform the work will be considered incidental.** Pavement and parkway restoration will be paid for separately under pavement removal, sidewalk removal, HMA surface and binder placement, sidewalk placement, and sod restoration.

Materials. All material shall abide by Downers Grove Sanitary District specifications for sewer construction.

Measurement and Payment. The work shall be paid for at the contract unit price per EACH for:

ADJUSTING SANITARY SERVICE LINES

which price shall include all work as described above.

SP-32 RELOCATE EXISTING MAILBOX

Description: This work shall consist of removing existing mailboxes and installing them at locations approved by the post office. It is the responsibility of the Contractor to coordinate their work with the post office.

Basis of Payment: This work will be paid for at the contract unit price per EACH for RELOCATE EXISTING MAILBOX, which price shall include furnishing the wood post and installing the box to the satisfaction of the Engineer.

SP-33 RELOCATE EXISTING BOULDERS

Description: This work shall consist of relocating existing boulders and installing them at locations approved by the Engineer.

Basis of Payment: This work will be paid for at the contract unit price per LUMP SUM for RELOCATE EXISTING BOULDERS, which price shall be payment in full for the work as specified herein.

SP-34 PAVEMENT PATCH, SPECIAL

Description: This work shall consist of all labor, materials and equipment required to construct the

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

pavement patches as specified in the details in the plans. The patches will not be quantified by depth.

Pavement patch will be paid for one (1) foot beyond each side of the max trench width as shown in the details on the plans. Please note the maximum width for payment shall be as noted in the details on the plans. When the pavement patch is located within the area of roadway resurfacing, the surface course and leveling binder will not be included in pavement patching. This work will be paid for as PAVEMENT PATCHING, SPECIAL, which price shall include hot-mix asphalt base course only.

Basis of Payment: This work shall be paid for at the contract unit price per **SQUARE YARD** for:

PAVEMENT PATCHING, SPECIAL, which price will include saw cutting and all other work required.

SP-35 HOT-MIX ASPHALT SURFACE COURSE, MIX “D”, N50, 2”

Description: This work will consist of the placement of Hot-Mix Asphalt Surface Course to the width and length indicated on the plans. The Hot-Mix Asphalt Surface Course shall be placed in accordance with the methods and with materials in accordance with Sections 406 and 1000 of the SSRBC. The maximum quantity paid for will be as indicated on the plans or in the field by the Engineer.

The Contractor shall not use equipment of excessive size or weight that causes damage to existing pavement or appurtenances. Any damage done to the existing pavement or appurtenances that are to remain in place shall be repaired or removed and replaced by the contractor at his/her own expense.

The supplying and application of bituminous prime on the full depth of edges shall be considered incidental.

Basis of Payment: This work shall be paid for at the contract unit price per **TON** for:

HOT-MIX ASPHALT SURFACE COURSE, MIX “D”, N50, 2”

which unit price shall be payment in full for all work as specified herein.

SP-36 LEVELING BINDER (MACHINE METHOD), N50, 3/4”

Description: This work will consist of the placement of leveling binder to the width and length indicated on the plans. The leveling binder shall be placed in accordance with the methods and with materials in accordance with Sections 406 and 1000 of the SSRBC. The maximum quantity paid for will be as indicated on the plans or in the field by the Engineer.

The Contractor shall not use equipment of excessive size or weight that causes damage to existing pavement or appurtenances. Any damage done to the existing pavement or appurtenances that are to remain in place shall be repaired or removed and replaced by the contractor at his/her own expense.

The supplying and application of bituminous prime on the full depth of edges shall be considered incidental.

Basis of Payment: This work shall be paid for at the contract unit price per **TON** for **LEVELING BINDER (MACHINE METHOD), N50**, which unit price shall be payment in full for all work as specified herein.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

SP-37 P.C.C. DRIVEWAY REMOVAL & REPLACEMENT, 6”

Description: This work shall consist of the removal and replacement of P.C.C. driveways at locations indicated on the plan and/or as required by the Engineer.

The replacement of the driveways shall consist of preparing a subgrade at all required locations, shaping of slopes adjacent to the driveways, the placement and compacting of six inches (6”) of CA-6 Aggregate Base, and the placement of six inches (6”) of Portland Cement Concrete.

This work shall also include the adjustment to proper grade of all water valve or private utility boxes encountered.

The locations at which this work will be measured for payment will consist of only those areas bounded by P.C.C gutter or shoulder. Those areas where the surface course of the pavement flares into existing driveways beyond the limits of the fully improved areas will not be included for payment.

Basis of Payment: This work shall be paid for at the contract unit price per **SQUARE YARD** for:

DRIVEWAY REMOVAL and PCC DRIVEWAY, 6”,

which price shall be payment in full for the work as specified herein.

SP-38 FIRE HYDRANTS TO BE ADJUSTED

Description: This work shall consist of vertical adjustment of fire hydrants as indicated by the plans. This work shall follow all applicable portions of Section 561 of the Standard Specifications and also in accordance with the Standard Specifications for Sewer and Water Construction in Illinois, latest edition.

Basis of Payment: This work shall be paid for at the contract unit price per **EACH** for

FIRE HYDRANTS TO BE ADJUSTED,

which price shall be payment in full for the work as specified herein.

SP-39 DOMESTIC WATER SERVICE BOXES TO BE ADJUSTED

Description: This work shall consist of vertical adjustment of fire domestic water service boxes as indicated by the plans. This work shall follow all applicable portions of Section 561 of the Standard Specifications and also in accordance with the Standard Specifications for Sewer and Water Construction in Illinois, latest edition.

Basis of Payment: This work shall be paid for at the contract unit price per **EACH** for

DOMESTIC WATER SERVICE BOXES TO BE ADJUSTED,

which price shall be payment in full for the work as specified herein.

SP-40 REMOVE AND REPLACE BITUMINOUS BIKE PATH

Description: This work shall consist of the replacement of asphalt bike paths at locations indicated on the

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

plan and/or as required by the Engineer.

The replacement of the driveways shall consist of preparing a subgrade at all required locations, shaping of slopes adjacent to the driveways, the placement and compacting of six inches (6") of CA-6 Aggregate Base, and the placement and compacting of three inches (3") of Hot-Mix Asphalt Surface, Mixture D, N50 (IL 9.5).

This work shall also include the adjustment to proper grade of all water valve or private utility boxes encountered.

Basis of Payment: This work shall be paid for at the contract unit price per **SQUARE YARD** for:

REMOVE AND REPLACE BITUMINOUS BIKE PATH,

which price shall be payment in full for the work as specified herein.

SP-41 REMOVE EXISTING FLARED END SECTION

Description: This work shall consist of all labor and materials required for removing the existing flared end section as indicated on the plans. This work shall be performed per Section 551. Removed flared end sections shall become the property of the Contractor and shall be legally removed from the construction site.

Basis of Payment: This work will be paid for at the contract unit price per **EACH** for

REMOVE EXISTING FLARED END SECTION.

SP-42 CASING PIPE FOR WATER MAIN, DIAMETER SPECIFIED

Description. This work shall consist of installing the adjusted water main in a steel casing pipe at locations indicated on the plans or as designated by the Engineer. Minimum wall thickness for the steel casing pipe shall be 1/4 inch. Casing pipe shall be used when the utilities are installed under the proposed storm sewer.

Basis of Payment: The work shall conform to the details in the plans and the Water and Sewer Specifications. Payment shall be made at the contract unit price per foot installed of

CASING PIPE FOR WATER MAIN,

of the diameter specified, which price will include any spacers and trench backfill.

V. BID and CONTRACT FORM (Village)

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

***THIS BID WHEN ACCEPTED AND SIGNED BY AN AUTHORIZED SIGNATORY OF THE VILLAGE OF DOWNERS GROVE SHALL BECOME A CONTRACT BINDING UPON BOTH PARTIES.

Entire Form Must Be Completed If a Submitted Bid Is To Be Considered For Award

BIDDER:

Mauro Sewer Construction
Company Name

July 15, 2022
Date

1251 Redox Rd
Street Address of Company

mauro@sewer-water.com
E-mail Address

Des Plaines, IL 60016
City, State, Zip

Carmel Lullo
Contact Name (Print)

847-803-2033
Business Phone

847-878-5078
24-Hour Telephone

Business Fax


Signature of Officer, Partner or Sole Proprietor

ATTEST: if a Corporation

Pasquale Mauro, President
Print Name & Title


Signature of Corporation Secretary

We hereby agree to furnish the Village of Downers Grove all necessary materials, equipment, labor, etc. to complete the project within the timeframe specified herein and in accordance with the provisions, instructions and specifications for the unit prices shown on the Schedule of Prices.

VILLAGE OF DOWNERS GROVE:

ATTEST:

Authorized Signature

Village Clerk

Title

Date

Date

In compliance with the specifications, the above-signed offers and agrees, if this Bid is accepted within 90 calendar days from the date of opening, to furnish any or all of the services upon which prices are quoted, at the price set opposite each item, delivered at the designated point within the time specified above.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

V. BID and CONTRACT FORM (Contractor)

*****THIS BID WHEN ACCEPTED AND SIGNED BY AN AUTHORIZED SIGNATORY OF THE VILLAGE OF DOWNERS GROVE SHALL BECOME A CONTRACT BINDING UPON BOTH PARTIES.**

Entire Form Must Be Completed If a Submitted Bid Is To Be Considered For Award

BIDDER:

Mauro Sewer Construction
Company Name

July 15, 2022
Date

1251 Redwood Rd
Street Address of Company

mauro@sewer-water.com
E-mail Address


Des Plaines, IL 60016
City, State, Zip

Carmi Lillo
Contact Name (Print)

847-803-2033
Business Phone


847-878-5078
24-Hour Telephone

Business Fax

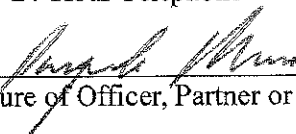
Signature of Officer, Partner or Sole Proprietor

ATTEST: if a Corporation

Pasquale Mauro, President
Print Name & Title

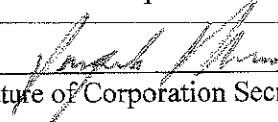
Signature of Corporation Secretary

We hereby agree to furnish the Village of Downers Grove all necessary materials, equipment, labor, etc. to complete the project within the timeframe specified herein and in accordance with the provisions, instructions and specifications for the unit prices shown on the Schedule of Prices.

VILLAGE OF DOWNERS GROVE:

ATTEST:

Authorized Signature

Village Clerk

Title

Date

Date

In compliance with the specifications, the above-signed offers and agrees, if this Bid is accepted within 90 calendar days from the date of opening, to furnish any or all of the services upon which prices are quoted, at the price set opposite each item, delivered at the designated point within the time specified above.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

SCHEDULE OF PRICES:

No.	Item	Description	Units	Quantity	Unit Price	Total Price
1	20100110	TREE REMOVAL UNITS (6 TO 15 UNITS DIAMETER)	UNIT	6	220.00	1,320.00
2	SP-11	TREE PROTECTION	FOOT	200	5.00	1,000.00
3	SP-12	TREE PRUNING	EACH	10	325.00	3,250.00
4	SP-13	TREE ROOT PRUNING	FOOT	100	11.00	1,100.00
5	SP-15	EARTH EXCAVATION, SPECIAL	CU.YD.	122	35.00	4,270.00
6	20201200	REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL	CU.YD.	20	50.00	1,000.00
7	SP-24	TRENCH BACKFILL	CU.YD.	730	30.00	21,900.00
8	SP-26	UNDERCUTTING FOR UTILITIES	CU.YD.	20	35.00	700.00
9	SP-10	PARKWAY RESTORATION, SOD, SPECIAL	SQ.YD.	750	23.50	17,625.00
10	25200200	SUPPLEMENTAL WATERING	UNIT	5	125.00	625.00
11	SP-17	TEMPORARY SURFACE OVER TRENCH - (AGGREGATE)	SQ.YD.	470	13.00	6,110.00
12	SP-16	COMBINATION CURB AND GUTTER, B-6.12	FOOT	475	52.00	24,700.00
13	28100101	STONE RIPRAP, CLASS A1	SQ.YD.	80	85.00	6,800.00
14	28200200	FILTER FABRIC	SQ.YD.	80	20.00	1,600.00
15	35101800	AGGREGATE BASE COURSE, TYPE B 6"	SQ.YD.	180	16.00	2,880.00
16	SP-18	AGGREGATE SHOULDERS, TYPE B	SQ.YD.	230	15.00	3,450.00
17	44000600	SIDEWALK REMOVAL	SQ.FT.	1,735	2.00	3,470.00
18	SP-19	DRIVEWAY REMOVAL	SQ.YD.	195	10.00	1,950.00
19	SP-19	HMA DRIVEWAY, 3"	SQ.YD.	145	45.00	6,525.00
20	SP-20	P.C.C. SIDEWALK, 5 INCH	SQ.FT.	1,185	12.00	14,220.00
21	SP-20	P.C.C. SIDEWALK, 6 INCH	SQ.FT.	550	16.50	9,075.00
22	SP-22	DETECTABLE WARNINGS	SQ.FT.	60	55.00	3,300.00
23	44000100	PAVEMENT REMOVAL	SQ.YD.	650	14.00	9,100.00
24	SP-34	PAVEMENT PATCHING, SPECIAL	SQ.YD.	470	62.00	29,140.00
25	SP-23	CONCRETE FLARED END SECTIONS	EACH	1	4,000.00	4,000.00
26	SP-21	STORM SEWERS, TYPE 1, 6", PVC	FOOT	30	75.00	2,250.00
27	SP-21	STORM SEWERS, TYPE 1, 12", RCP	FOOT	117	75.00	8,775.00
28	SP-21	STORM SEWERS, TYPE 1, 15", RCP	FOOT	49	89.00	4,361.00
29	SP-21	STORM SEWERS, TYPE 1, 18", RCP	FOOT	229	95.00	21,755.00
30	SP-21	STORM SEWERS, TYPE 1, 24", RCP	FOOT	427	100.00	42,700.00
31	SP-21	STORM SEWERS, TYPE 2, 24", RCP	FOOT	358	122.00	43,676.00
32	SP-21	STORM SEWERS, TYPE 1, 36", RCP	FOOT	50	130.00	6,500.00
33	55100500	STORM SEWER REMOVAL 12"	FOOT	108	15.00	1,620.00
34	55100700	STORM SEWER REMOVAL 15"	FOOT	104	19.00	1,976.00
35	56106400	ADJUSTING WATER MAIN 8"	FOOT	35	150.00	5,250.00
36	SP-42	CASING PIPE FOR WATER MAIN, 8"	FOOT	25	125.00	3,125.00
37	SP-31	ADJUSTING SANITARY SERVICE LINES	EACH	5	1,000.00	5,000.00
38	SP-30	WATER SERVICE REPLACEMENT	EACH	5	1,000.00	5,000.00
39	SP-23	CATCH BASINS, TYPE A, 4'-DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	3	6,700.00	20,100.00

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

40	SP-23	CATCH BASINS, TYPE A, 4' DIAMETER, TYPE 8 GRATE	EACH	4	6,350.00	25,400.00
41	SP-23	MANHOLES, TYPE A, 4' DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	4	6,000.00	24,000.00
42	SP-23	MANHOLES, TYPE A, 4' DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	1	6,000.00	6,000.00
43	SP-23	MANHOLES, TYPE A, 5' DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	1	8,000.00	8,000.00
44	SP-23	MANHOLES, TYPE A, 5' DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	1	8,000.00	8,000.00
45	SP-23	MANHOLES, TYPE A, 6'-DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	1	9,500.00	9,500.00
46	SP-23	MANHOLES, TYPE A, 6' DIAMETER, TYPE 8 GRATE	EACH	1	8,500.00	8,500.00
47	SP-23	INLETS, TYPE A, TYPE 8 GRATE	EACH	2	1,200.00	2,400.00
48	SP-23	INLETS, TYPE A, TYPE 1 FRAME, OPEN LID	EACH	3	1,500.00	4,500.00
49	60260500	INLETS TO BE ADJUSTED WITH NEW TYPE 3 FRAME AND GRATE	EACH	1	1,000.00	1,000.00
50	60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	5	700.00	3,500.00
51	44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SQ.YD.	3,582	5.00	17,910.00
52	40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	140	160.00	22,400.00
53	SP-35	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50, 2"	TON	455	135.60	61,425.00
54	SP-28	RE-GRADE DITCH LINE	FOOT	460	15.00	6,900.00
55	SP-25	ADDITIONAL HAULING SURCHARGE, NON-HAZARDOUS SPECIAL WASTE	LOAD	2	1,400.00	2,800.00
56	SP-8	STREET SWEEPING AND DUST CONTROL	HOUR	10	220.00	2,200.00
57	SP-29	EXPLORATORY TRENCH, SPECIAL	CU.YD.	5	75.00	375.00
58	SP-32	RELOCATE EXISTING MAILBOX	EACH	2	150.00	300.00
59	SP-37	P.C.C. DRIVEWAY, 6"	SQ.YD.	50	145.00	7,250.00
60	SP-41	REMOVE EXISTING FLARED END SECTION	EACH	2	250.00	500.00
61	63300575	REMOVE AND REERECT RAIL ELEMENT OF EXISTING GUARDRAIL	FOOT	20	75.00	1,500.00
62	SP-40	REMOVE AND REPLACE BITUMINOUS BIKE PATH	SQ.YD.	210	55.00	11,550.00
63	67100100	MOBILIZATION	L.SUM.	1	6,000.00	6,000.00
64	SP-6	PRECONSTRUCTION VIDEO	L.SUM.	1	1,750.00	1,750.00
65	SP-4	CONSTRUCTION STAKING AND RECORD DRAWING	L.SUM.	1	10,000.00	10,000.00
66	SP-7	TRAFFIC CONTROL, MAINTENANCE OF TRAFFIC DETOURS	L.SUM.	1	25,000.00	25,000.00

Total Bid Amount 629,858.00

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

BIDDER'S CERTIFICATION (page 1 of 3)

With regard to Otis/Florence/Grant Drainage, Bidder Miami Street Construction
(Name of Project) Improvements (Name of Bidder)
hereby certifies the following:

1. Bidder is not barred from bidding this Contract as a result of violations of Section 720 ILCS 5/33E-3 (Bid Rigging) or 720 ILCS 5/33E-4 (Bid-Rotating);
2. Bidder certifies that it has a written sexual harassment policy in place and full compliance with 775 ILCS 5/2-105(A)(4);
3. Bidder certifies that not less than the prevailing rate of wages as determined by the Village of Downers Grove, DuPage County or the Illinois Department of Labor shall be paid to all laborers, workers and mechanics performing work for the Village of Downers Grove. All bonds shall include a provision as will guarantee the faithful performance of such prevailing wage clause. Bidder agrees to comply with the Illinois Prevailing Wage Act, 820 ILCS 130/1 et seq., for all work completed. Bidder agrees to pay the prevailing wage and require that all of its subcontractors pay prevailing wage to any laborers, workers or mechanics who perform work pursuant to this Contract or related subcontract. Bidder and each subcontractor shall keep or cause to be kept an accurate record of each worker's name, address, telephone number when available, the last four digits of the worker's social security number, gender, race, ethnicity, veteran's status, skill level, classification, hourly wage paid (including itemized hourly cash and fringe benefits paid in each pay period), number of hours worked each day, the starting and ending times of work each day, the worker's hourly wage rate, the worker's hourly overtime wage rate, the worker's hourly fringe benefit rates, the name and address of each fringe benefit fund, the plan sponsor of each fringe benefit, if applicable, and the plan administrator of each fringe benefit, if applicable. This record shall be sent to the Illinois Department of Labor no later than the fifteenth (15th) day of each calendar month for the immediately preceding month in which construction on a public works project has occurred. Contractor shall then provide an IDOL certification and case number to the Village. The records must be preserved for five (5) years following completion of the contract. Bidder certifies that Bidder and any subcontractors working on the project are aware that filing false payroll records is a Class A misdemeanor and that the monetary penalties for violations are to be paid pursuant to law by the Bidder, contractor and subcontractor. The Village shall not be liable for any underpayments. If applicable: Since this is a contract for a fixed public works project, as defined in 820 ILCS 130/2, Contractor agrees to post at the job site in an easily accessible place, the prevailing wages for each craft or type of worker or mechanic needed to execute the contract or work to be performed;
4. Bidder certifies that it is in full compliance with the Federal Highway Administrative Rules on Controlled Substances and Alcohol Use and Testing, 49 C.F.R. Parts 40 and 382 and that all employee drivers are currently participating in a drug and alcohol testing program pursuant to the Rules;
5. Bidder further certifies that it is not delinquent in the payment of any tax administered by the Department of Revenue, or that Bidder is contesting its liability for the tax delinquency or the amount of a tax delinquency in accordance with the procedures established by the appropriate Revenue Act. Bidder further certifies that if it owes any tax payment(s) to the Department of Revenue, Bidder has entered into an agreement with the Department of Revenue for the payment of all such taxes that are due, and Bidder is in compliance with the agreement.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

BIDDER'S CERTIFICATION (page 2 of 3)

BY: [Signature]
Bidder's Authorized Agent

36 - 37 4 8 1 7 1

FEDERAL TAXPAYER IDENTIFICATION NUMBER

or _____
Social Security Number

Subscribed and sworn to before me
this 15 day of July, 2022

[Signature]
Notary Public

(Fill Out Applicable Paragraph Below)



(a) Corporation

The Bidder is a corporation organized and existing under the laws of the State of Illinois, which operates under the Legal name of Mauco Simer Construction, and the full names of its Officers are as follows:

President: Pasquale Mauco

Secretary: Pasquale Mauco

Treasurer: _____

and it does have a corporate seal. (In the event that this bid is executed by other than the President, attach hereto a certified copy of that section of Corporate By-Laws or other authorization by the Corporation which permits the person to execute the offer for the corporation.)

Limited Liability Company (LLC)

The Bidder is a LLC organized and existing under the laws of the State of _____, which operates under the legal name of _____, and the full names of its managers or members are as follows:

Manager or Member: _____

Manager or Member: _____

Manager or Member: _____

Manager or Member: _____

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

BIDDER'S CERTIFICATION (page 3 of 3)

(c) Partnership

The partnership does business under the legal name of: _____,
which name is registered with the office of _____ in the State of _____.

Names and Addresses of All Partners:

(d) Sole Proprietor

The Bidder is a Sole Proprietor whose full name is: _____; and if
operating under a trade name, said trade name is: _____, which name is
registered with the office of _____ in the State of _____.

6. Are you willing to comply with the Village's insurance requirements within 10 days of the award of the contract? YES NO (circle one)

INSURER'S NAME: Bessler Holding Company

AGENT: Monica Kalman

Street Address: 601 Academy Dr


City, State, Zip Code: Northbrook, IL 60062

Telephone Number: _____

I/We hereby affirm that the above certifications are true and accurate and that I/we have read and understand them.

Print Name of Company: Mauro Sewer Construction

Print Name and Title of Authorizing Signature: Paragene Mauro

Signature: 

Date: 7/15/22

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

MUNICIPAL REFERENCE LIST

Municipality: Village of Mount Prospect
 Address: 50 S. Emerson St, Mt. Prospect, IL
 Contact Name: Mark Lattner Phone #: 817-870-5640
 Name of Project: Mount Prospect Forest Ave Drainage Improvement
 Contract Value: 693,253.00 Date of Completion: 2019

Municipality: Village of Northbrook
 Address: 1225 Cedar Ln Northbrook, IL
 Contact Name: Aram Bebedi Phone #: 817-664-4133
 Name of Project: Northbrook Local Drainage Improvements
 Contract Value: 58,351.00 Date of Completion: 2020

Municipality: Village of Mount Prospect
 Address: 50 S. Emerson St. Mt. Prospect, IL
 Contact Name: Dana Brown Phone #: 817-870-5640
 Name of Project: Mount Prospect Backyard Drainage Improvement
 Contract Value: 124,779.00 Date of Completion: 2020

Municipality: City of Crystal Lake
 Address: 100 W. Woodstock St, Crystal Lake
 Contact Name: Mark Stanek Phone #: 815-356-3605
 Name of Project: Crystal Lake Mary Lane Drainage Improvement
 Contract Value: 124,330.00 Date of Completion: 2018

Municipality: Ela Township
 Address: 23605 N. Echo Lake Rd Lake Zurich
 Contact Name: Ela Township Highway Dept Phone #: 847-438-2371
 Name of Project: Ela Township Marilyn Lane Drainage Improvement
 Contract Value: 385,779.00 Date of Completion: 2019

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

SUBCONTRACTORS LIST

The Bidder hereby states the following items of work will not be performed by its organization. (List items to be subcontracted as well as the names, addresses and phone numbers of the subcontractors.)

1) Schroeder Asphalt Services Type of Work Asphalt / Paving

Addr: PO BOX 831 City Huntley State IL Zip 60142

2) Carreca Concrete Construction Type of Work Concrete

Addr: 1395 Louis Avenue City Els Grove Village State IL Zip 60007

3) Conin Contractors Services, Inc Type of Work landscaping

Addr: PO Box 1022 City Bethlehem State IL Zip 61008

4) _____ Type of Work _____

Addr: _____ City _____ State _____ Zip _____

5) _____ Type of Work _____

Addr: _____ City _____ State _____ Zip _____

6) _____ Type of Work _____

Addr: _____ City _____ State _____ Zip _____

7) _____ Type of Work _____

Addr: _____ City _____ State _____ Zip _____

8) _____ Type of Work _____

Addr: _____ City _____ State _____ Zip _____

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

CERTIFICATION OF QUALIFICATIONS

Project Team

Project Manager: Carmi Lullo

Superintendent: Jaime Carro

Team Member: Eddy Carro - Foreman

Team Member: Harry Gross - Foreman

Team Member: Mike Fini - Foreman

Team Member: _____

Team Member: _____

Team Member: _____

By checking this box, the bidder hereby certifies that it complies with all requirements of SP-3 including at least three (3) contracts of similar nature and scope within the last five (5) years, and can provide detailed supporting information upon request.

Signed by: [Signature] (Corporate Seal)

Title: President


Name & Address: North Sewer Construction

of Contractor 1251 Redwood Rd Des Plaines, IL 60018

or Vendor _____

Subscribed and sworn to before me this 15 day of July, 2022

[Signature]
Notary Public



Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)



VENDOR W-9 REQUEST FORM

The law requires that we maintain accurate taxpayer identification numbers for all individuals and partnerships to whom we make payments, because we are required to report to the I.R.S all payments of \$600 or more annually. We also follow the I.R.S. recommendation that this information be maintained for all payees including corporations.

Please complete the following substitute W-9 letter to assist us in meeting our I.R.S. reporting requirements. The information below will be used to determine whether we are required to send you a Form 1099. Please respond as soon as possible, as failure to do so will delay our payments.

BUSINESS (PLEASE PRINT OR TYPE):

NAME: Navro Sewer Construction

ADDRESS: 1251 Redeker Rd

CITY: Des Plaines

STATE: IL

ZIP: 60016

PHONE: 847-803-2033 FAX: _____

TAX ID #(TIN): 36-3748171

(If you are supplying a social security number, please give your full name)

REMIT TO ADDRESS (IF DIFFERENT FROM ABOVE):

NAME: _____

ADDRESS: _____

CITY: _____

STATE: _____ ZIP: _____

TYPE OF ENTITY (CIRCLE ONE):

- Individual
- Sole Proprietor
- Partnership
- Charitable/Nonprofit
- Limited Liability Company – Member-Managed
- Limited Liability Company- Manager-Managed
- Medical Corporation
- Government Agency

SIGNATURE: [Signature]

DATE: 7/15/22

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Apprenticeship and Training Certification

(Does not apply to federal aid projects. Applicable only to maintenance and construction projects that use Motor Fuel Tax funds or state grant monies.)

Name of Bidder: Mauro Sewer Construction

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the Bidder certifies that it is a participant, either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The Bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this Contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Illinois Department of Labor, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The Bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the Bidder is a participant and that will be performed with the Bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. **The Bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project is accounted for and listed. Return this with the Bid.**

Operating Engineers Local 150

Chicago and Laborers' Training and Apprenticeship Program

The requirements of this certification and disclosure are a material part of the Contract, and the Contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this Contract.

Print Name and Title of Authorizing Signature: Pasquale Mauro, President

Signature: 

Date: 7/15/22

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

BUY AMERICA CERTIFICATION

Certification requirement for procurement of steel, iron, or manufactured products when Federal funds (Grant Agreement or Cooperative Agreement) are used.


Instructions:

Bidder to complete the Buy America Certification listed below. Bidder shall certify EITHER COMPLIANCE OR NON-COMPLIANCE (not both). This Certification MUST BE submitted with the Bidder's bid response.

Special Note: Make sure you have signed only one of the above statements – either Compliance OR Non-Compliance (not both).

Certificate of Compliance

The bidder or offeror hereby certifies that it **will meet** the requirements of 49 U.S.C. 5323(j)(1), as amended, and the applicable regulations in 49 CFR Part 661.

Signature 

Company Name Maura Zuer Construction

Title President

Date 7/15/22

Certificate of Non-Compliance

The bidder or offeror hereby certifies that it **cannot comply** with the requirements of 49 U.S.C. 5323(j)(1), as amended, and 49 C.F.R. 661, but it may qualify for an exception pursuant to 49 U.S.C. 5323(j)(2)(A), 5323(j)(2)(B), or 5323(j)(2)(D), and 49 C.F.R. 661-7.

Signature _____

Company Name _____

Title _____

Date _____

AFTER THIS CERTIFICATE HAS BEEN EXECUTED, A BIDDER MAY NOT SEEK A WAIVER.

Note: The U.S./Canadian Free Trade Agreement does not supersede the Buy America requirement.

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

Suspension or Debarment Certificate
--

Non-Federal entities are prohibited from contracting with or making sub-awards under covered transactions to parties that are suspended or debarred or whose principals are suspended or debarred. Covered transactions include procurement for goods or services equal to or in excess of \$100,000.00. Contractors receiving individual awards for \$100,000.00 or more and all sub-recipients must certify that the organization and its principals are not suspended or debarred.

By submitting this offer and signing this certificate, the Bidder certifies to the best of its knowledge and belief, that the company and its principals:

1. Are not presently debarred, suspended, proposed for debarment, declared ineligible or voluntarily excluded from covered transactions by any federal, state or local governmental entity, department or agency;
2. Have not within a three-year period preceding this Bid been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction, or convicted of or had a civil judgment against them for a violation of Federal or state antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
3. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State, or local) with commission of any of the offenses enumerated in paragraph (2) of this certification; and
4. Have not within a three-year period preceding this application/proposal/contract had one or more public transactions (Federal, State or local) terminated for cause or default.

If the Bidder is unable to certify to any of the statements in this certification, Bidder shall attach an explanation to this certification.

Company Name: Mauro Sewer Construction

Address: 1251 Redaker Rd

City: Des Plaines, IL Zip Code: 60016

Telephone: (847) 203 2033 Fax Number: () _____

E-mail Address: mauro@sewer-water.com

Authorized Company Signature: 

Print Signature Name: Pasquale Mauro Title of Official: President

Date: 7/15/22

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

CAMPAIGN DISCLOSURE CERTIFICATE

Any contractor, proposer, bidder or vendor who responds by submitting a bid or proposal to the Village of Downers Grove shall be required to submit with its bid submission, an executed Campaign Disclosure Certificate.

The Campaign Disclosure Certificate is required pursuant to the Village of Downers Grove Council Policy on Ethical Standards and is applicable to those campaign contributions made to any member of the Village Council.

Said Campaign Disclosure Certificate requires any individual or entity bidding to disclose campaign contributions, as defined in Section 9-1.4 of the Election Code (10 ILCS 5/9-1.4), made to current members of the Village Council within the five (5) year period preceding the date of the bid or proposal release.

By signing the bid documents, contractor/proposer/bidder/vendor agrees to refrain from making any campaign contributions as defined in Section 9-1.4 of the Election Code (10 ILCS 5/9-1.4) to any Village Council member and any challengers seeking to serve as a member of the Downers Grove Village Council.

Manro Sauer Construction, Pasquale Manro

Under penalty of perjury, I declare:

- i. Bidder/vendor has not contributed to any elected Village position within the last five (5) years.

[Signature]
Signature

Pasquale Manro
Print Name

- ii. Bidder/vendor has contributed a campaign contribution to a current member of the Village Council within the last five (5) years.

Print the following information:

Name of Contributor: _____
(company or individual)

To whom contribution was made: _____

Year contribution made: _____ Amount: \$ _____

Signature

Print Name

Part III. Work Subcontracted to Others.

For each contract described in Part I, list all the work you have subcontracted to others.

	2	3	4	Awards Pending	1
Subcontractor	Kyler Kowale		Carrera Concrete		
Type of Work	Pre-Cast video		Concrete		
Subcontract Price	1,500	N/A	48,500.00		
Amount Uncompleted	1,500		48,500		
Subcontractor	RS Underground		JA Johnson Paving		
Type of Work	Directional Drill	N/A	Asphalt		
Subcontract Price	11,900.00		52,421.25		
Amount Uncompleted			52,421.25		
Subcontractor	Schneider Asphalt		Innovation		
Type of Work	Asphalt	N/A	landscaping		
Subcontract Price	34,237.60		35,000.00		
Amount Uncompleted			35,000.00		
Subcontractor	TAT Enterprises		Clean Cut		
Type of Work	Concrete	N/A	tree removal		
Subcontract Price	256,793.22		12,050.00		
Amount Uncompleted			12,050.00		
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Total Uncompleted					

Notary

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates.

Officer or Director

Paquale Mauer

Title

President

Signature

[Signature]

Date

7/15/22

Company

Naum Sawyer Construction

Address

1251 Reicker Rd

City

Des Plaines

State

IL

Zip Code


60016

Subscribed and sworn to before me

this 15th day of July, 2022

[Signature]
(Signature of Notary Public)

My commission expires 01/22/2024



(Notary Seal)

Add pages for additional contracts



ATLANTIC SPECIALTY INSURANCE COMPANY

605 Highway 169 North, Suite 800
 Plymouth, Minnesota 55441
 Phone: 1-800-662-0156
 www.onebeaconsurety.com

Bid Bond

CONTRACTOR:

(Name, legal status and address)

Mauro Sewer Construction, Inc.
1251 Redeker Road
Des Plaines, IL. 60016

OWNER:

(Name, legal status and address)

Village of Downers Grove
5101 Walnut Avenue
Downers Grove, IL. 60515

SURETY:

(Name, legal status and principal place of business)

Atlantic Specialty Insurance Company
605 Highway 169 North, Suite 800
Plymouth, Minnesota 55441

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

BOND AMOUNT: Five Percent of Amount Bid (5% of Bid Amount)

PROJECT:

(Name, location or address and Project number, if any)

Otis/Florence/Grant Drainage Improvements

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 15th day of July, 2022

Nancy Quintero, Oper. Mgr. (Witness)

Mauro Sewer Construction, Inc.
, Principal (Seal)
 Pasquale Mauro, President (Title)
Atlantic Specialty Insurance Company
 (Surety)

Ronnee Kieft, Oper. Mgr. (Witness)

James Tragos, Attorney-in-Fact (Title), (Seal)

The language in this document conforms exactly to the language used in AIA Document A310 - Bid Bond 2010 edition.



Power of Attorney

KNOW ALL MEN BY THESE PRESENTS, that ATLANTIC SPECIALTY INSURANCE COMPANY, a New York corporation with its principal office in Plymouth, Minnesota, does hereby constitute and appoint: Gregory Cerniglia, Ronee Kieft, Donald J. Scott, James Tragos, Monica Kalman, each individually if there be more than one named, its true and lawful Attorney-in-Fact, to make, execute, seal and deliver, for and on its behalf as surety, any and all bonds, recognizances, contracts of indemnity, and all other writings obligatory in the nature thereof; provided that no bond or undertaking executed under this authority shall exceed in amount the sum of: unlimited and the execution of such bonds, recognizances, contracts of indemnity, and all other writings obligatory in the nature thereof in pursuance of these presents, shall be as binding upon said Company as if they had been fully signed by an authorized officer of the Company and sealed with the Company seal. This Power of Attorney is made and executed by authority of the following resolutions adopted by the Board of Directors of ATLANTIC SPECIALTY INSURANCE COMPANY on the twenty-fifth day of September, 2012:

Resolved: That the President, any Senior Vice President or Vice-President (each an "Authorized Officer") may execute for and in behalf of the Company any and all bonds, recognizances, contracts of indemnity, and all other writings obligatory in the nature thereof, and affix the seal of the Company thereto; and that the Authorized Officer may appoint and authorize an Attorney-in-Fact to execute on behalf of the Company any and all such instruments and to affix the Company seal thereto; and that the Authorized Officer may at any time remove any such Attorney-in-Fact and revoke all power and authority given to any such Attorney-in-Fact.

Resolved: That the Attorney-in-Fact may be given full power and authority to execute for and in the name and on behalf of the Company any and all bonds, recognizances, contracts of indemnity, and all other writings obligatory in the nature thereof, and any such instrument executed by any such Attorney-in-Fact shall be as binding upon the Company as if signed and sealed by an Authorized Officer and, further, the Attorney-in-Fact is hereby authorized to verify any affidavit required to be attached to bonds, recognizances, contracts of indemnity, and all other writings obligatory in the nature thereof.

This power of attorney is signed and sealed by facsimile under the authority of the following Resolution adopted by the Board of Directors of ATLANTIC SPECIALTY INSURANCE COMPANY on the twenty-fifth day of September, 2012:

Resolved: That the signature of an Authorized Officer, the signature of the Secretary or the Assistant Secretary, and the Company seal may be affixed by facsimile to any power of attorney or to any certificate relating thereto appointing an Attorney-in-Fact for purposes only of executing and sealing any bond, undertaking, recognizance or other written obligation in the nature thereof, and any such signature and seal where so used, being hereby adopted by the Company as the original signature of such officer and the original seal of the Company, to be valid and binding upon the Company with the same force and effect as though manually affixed.


IN WITNESS WHEREOF, ATLANTIC SPECIALTY INSURANCE COMPANY has caused these presents to be signed by an Authorized Officer and the seal of the Company to be affixed this twenty-seventh day of April, 2020.



By Paul J. Brehm
Paul J. Brehm, Senior Vice President

STATE OF MINNESOTA
HENNEPIN COUNTY

On this twenty-seventh day of April, 2020, before me personally came Paul J. Brehm, Senior Vice President of ATLANTIC SPECIALTY INSURANCE COMPANY, to me personally known to be the individual and officer described in and who executed the preceding instrument, and he acknowledged the execution of the same, and being by me duly sworn, that he is the said officer of the Company aforesaid, and that the seal affixed to the preceding instrument is the seal of said Company and that the said seal and the signature as such officer was duly affixed and subscribed to the said instrument by the authority and at the direction of the Company.

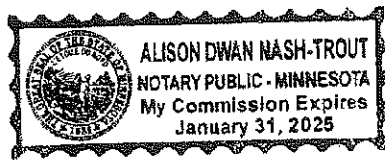

Alison Nash-Trout
Notary Public

I, the undersigned, Secretary of ATLANTIC SPECIALTY INSURANCE COMPANY, a New York Corporation, do hereby certify that the foregoing power of attorney is in full force and has not been revoked, and the resolutions set forth above are now in force.

Signed and sealed. Dated 15th day of July, 2022.



Kara Barrow
Kara Barrow, Secretary

This Power of Attorney expires
January 31, 2025

Bassler & Co
- INSURANCE AGENCY -
Trusted Advisor Since 1944

July 8, 2022

Village of Downers Grove
5101 Walnut Ave.
Downers Grove, IL 60515

Re: Mauro Sewer Construction Co.
Water System Separation

To Whom it May Concern:

Through this agency, Mauro Sewer Construction Co. has advised CNA Insurance Company that they will be offering a bid to the Village of Downers Grove-Otis/Florence/Grant Drainage Improvements.

In the event the bid of Mauro Sewer Construction Co. is accepted, and a contract is awarded to this bidder, and if the contractor so requests, CNA Insurance Company will provide all the insurance coverage as outlined in the project specifications.

Sincerely,

Monica Kalman

Monica Kalman
Commercial Account Manager

Bassler & Co
- INSURANCE AGENCY -
Trusted Advisor Since 1944

July 14, 2022

Village of Downers Grove
5101 Walnut Avenue
Downers Grove, IL. 60515

RE: Mauro Sewer Construction, Inc.- Otis/Florence/Grant Drainage Improvements

To Whom It May Concern:

Mauro Sewer Construction, Inc. is a valued client of Atlantic Specialty Insurance Company, with bonds being handled by Bassler Holding Company in Northbrook.

Atlantic Specialty Insurance Company maintains an A.M. Best's rating of A+XV. Mauro Sewer Construction, Inc. projects have been supported in excess of the \$6,000,000 single job range with an approximate 10,000,000 aggregate.

Atlantic Specialty Insurance Company will issue bid bonds, performance bonds, and labor and material payment bonds for Mauro Sewer Construction, Inc. subject to review of the contract documents and bond forms acceptable to the surety.

We consider Mauro Sewer Construction, Inc. to be an outstanding contractor from both a workmanship and integrity standpoint and would not hesitate to recommend them on any projects you may be considering.

Please do not hesitate to call with any questions.

Sincerely,



James Tragos
Attorney-in-Fact
Atlantic Specialty Insurance Company

Bassler Holding Company

611 Academy Dr. Northbrook, IL 60062

www.basslerins.com

Village of Downers Grove – Otis/Florence/Grant Drainage Improvements (SW-096)

BID SUBMITTAL CHECKLIST

Each Bidder's Bid Package must be submitted with all requisite forms properly completed, and all documentation included. The following list is not all-inclusive, but is designed to facilitate a good, competitive bidding environment.

1. Instructions to Bidders read and understood. Any questions must be asked according to the instructions.
2. Cover sheet filled-in
3. Bid Form copies filled-in. All copies must have original signatures and seals on them.
4. Bid Bond or cashier's check enclosed with bid package.
5. Schedule of Prices completed. Check your math!
6. Bidder Certifications signed and sealed.
7. Letter from Surety ensuring issuance of Performance and Labor Bonds.
8. Letter from Insurance Agent or Carrier ensuring issuance of required job coverage.
9. Municipal Reference List completed.

10. Vendor request form W-9 completed.
11. Affidavit (IDOT Form BC-57, or similar).
12. Bid package properly sealed and labeled before delivery. If sending by mail or messenger, enclose in a second outer envelope or container. Project plan sheets do not have to be included with the bid package.

VILLAGE OF DOWNERS GROVE
COUNCIL ACTION SUMMARY

INITIATED: Public Works DATE: August 2, 2022
(Name)

RECOMMENDATION FROM: _____ FILE REF: SW-096
(Board or Department)

NATURE OF ACTION:

STEPS NEEDED TO IMPLEMENT ACTION:

- Ordinance
- Resolution
- Motion
- Other

Motion to authorize execution of a contract for the Otis/Florence/Grant Drainage Improvement project (SW-096) to Mauro Sewer Construction in the amount of \$629,858 plus a 5% contingency in the amount of \$31,492.90 for a total not-to-exceed \$661,350.90.



SUMMARY OF ITEM:

Adoption of this motion shall authorize execution of a contract for the Otis/Florence/Grant Drainage Improvement project (SW-096) to Mauro Sewer Construction in the amount of \$629,858 plus a 5% contingency in the amount of \$31,492.90 for a total not-to-exceed \$661,350.90.

RECORD OF ACTION TAKEN:
